



WEB 1u)ÚG!5B `

RG-S2600E 2Ī ë x 6


RGOS 10.4(3b19)

(Ä â

Jä K5%4°©2000-2012

Jä K5%4°(ÝÈ J±+Í `ž Äâ,X Ô Û ýÄ

p k Jä K5%4°,X :M6ACE Ä Æ) Ž á k'í) •ã ê 6 ä í `Y,X Ĩ)F¼ ÚE->
á Ä,) Ä Û Ñ Ä Ä Ä ô •Ä5IA¥ ä JªAA?Ô Ä Ú J <F¼ êF¼ Ú*ü b î*üEè Ä



!B÷ Ä â

`Y•qB), ÝµC 0 È+ b{(4{ê Jªs´ÈJY•Ý Ä6Ñ - È ÄJä
K5%4° ±+ ü"u Ý Ĩ)Ei-1 ê5Û ð/,X™ %o ß í `Y•E-> Ä ,X ýÄ

`™ 0 S*ü Û Ð ÈJä K5%4° ü4ê m `È Æ o±A•JY•š.B ÄM4 È J á
.B ± `Y•` <"u ÝJíAÄ êF+\$ã È ` ,X ÝµC 3 á X ä Ĩ) ä/ ê k/,X™
± Ä

T Õ

Jä K5%4° I •5%0- Ö<http://www.ruijie.com.cn/> Ä

| Ä 1 ü I5% 9< k Ô „,X { • T C m Ä { • Lp s ´ žKÂNI Ú d Ä { •,X h
*ü? • ‡ • ÄEC Ê 4{C m1 1 Ä

Jä K5%4° ü4“ v á Ö<http://webchat.ruijie.com.cn> Ä

| Ä 1 ü 1 0 1 ½8:30 7Ç .6&• ÈÈE› ü4“ v á 9< k µ C |A¶ ÄE°/BAxA© fLp Ä
EC ÊÄÊ x1 T Ö Ä 1LÔ ßEQ v 0Ä È Ä 1 G Ê p Ò Ä ≠L È È • “ ¿ K Ä

Jä K5%4°E°/ß T Ö — Ö<http://www.ruijie.com.cn/service.aspx> Ä

Jä K5%4°E°/ß T Ö — Ä 1 Ý,X v µ o LÔ?U,X T } `? • ‡ •
Ä Í b v F ,X { •,X]>™ ÄEC Ê,XG!5B 1 ž J W,X5%4° ü6Ñ,XKÂNI È v
á u —FÑ Ú µ oE™Eó,X T Ö Ä

7 h24 ä Ê T á u&Ä4“ Ö4008-111-000

Jä K5%4° T AŽ / Ö <http://support.ruijie.com.cn>

Jä K5%4° T Ö ä ;O\ µ1... Öservice@ruijie.com.cn

,ì GC m

´ á/Ä	AÈ á
-------	------

ò B ` •ü ¥Ü•ÿ]P @

Ü24 PD(× Äns6Ñó(⇒)Ú„P,Mc20CmVÉ\$e ZA' nò \$>™ò nõG°©P

{ •]>™ `

Žò„,3€•0Nò v0 Žò QrüÑ“!U /P “!U / { •

Žò„,3 s Nò v0 HIU c 2 4

(AÈ â

´ Í h,XEC Ê(Ö RGOS®10.4 (3b19)(Ä

Aİ5Ù ÍB5

:EÖ Ü ß ë Ž ,KÙAİ

5%4° 1/ß Ü

T |S Ž ,

5%4°1u)Ú ,

:4z n

1. Eî*ü ã4z n

4œ0Ã µ C / ã Ö8Ã [*ü Courier New È [*ü _ 'È [+û ã 5 È È></
#)Eg Î µ C Ä µ C ,X*ü ø4œ0ÃÈg 9,X µ C ÈG>*ü t2k + '></ Ä

2. Q ,> ã4z n

Q ,> + 'G>*ü*ü Arial È K ',Ì G ã ã V ß Ö
2k ' Ö Q ,> GK + Ä Q , ± Ö á -™NO';Eg,XF¼ Ú ÅG>*ü t2k + '></ Ä
p ' Ö Q ,> -D Ä Q , ™NO+ rL E¯> Ó .,XF¼ Ú ÅG>*ü p '></
[] Ö></ *ü [] ÀCK 9,XF¼ Ú È ü Q ,G!5B È ÄEÝ,X Ä
{x|y|...}Ö></ ø p ê î pEÝNM EÝª Ô p Ä
[x|y|...]Ö></ ø p ê î pEÝNM EÝª Ô p ê ð 5Ù áEÝ Ä
//Ö+ p 4 Ô ÿ,X> ></ "%Gž> Ä

3. Ø20 Ū «

:E-G,*ü Ø/iGf,Â Ū « 9></ ü ; 0E>/ß hA¹(M ŷ"¼ ā,X • È- o Ū «,X ā
V ß Ö

✦ "¼ ā ÆA: Æ µGf ; 0 h"¼ ā,X _NM Æ

AÈ â Æ µ/ Æ0aK¼ Æ Í ; 0 Y •,X £EÆE⁻> ™?U,X>9

4. AÈ â

` _AÈ âF¼ Ú,X0Ã ·2O _ à rL Æ6Ñ á0ú ÈL ; 0 LÔ?U Ý'; Ø {•
Ö,X0Ã ·2O _E⁻> G!5B Æ

`F¼ Ú _ ,X / µ C Æ6Ñ ŷ Ý J W {•2Ī ë,X Y •Ã V {• _ È Æ£
EÄ1 ÆÈ K' / µ CAÈ ¹ rL S*ü,XA' Ū µ C š Æ

` #]ž,XCÃ+ <žCÃ+ < {•Ò Ū È·>< Z Ô8 ā ß,XCÃ+ <È¹ ž
Eµ> ZCÃ+ #A,,X Ý x6 Æ



-WEB

WEB 105B1G8VÖ


1. WEB 10

1 WEB

1.1 WEB


WEB 10 ES 10 IE 91 54 6

WEB 10 WEB 10 WEB 10 WEB 10
WEB

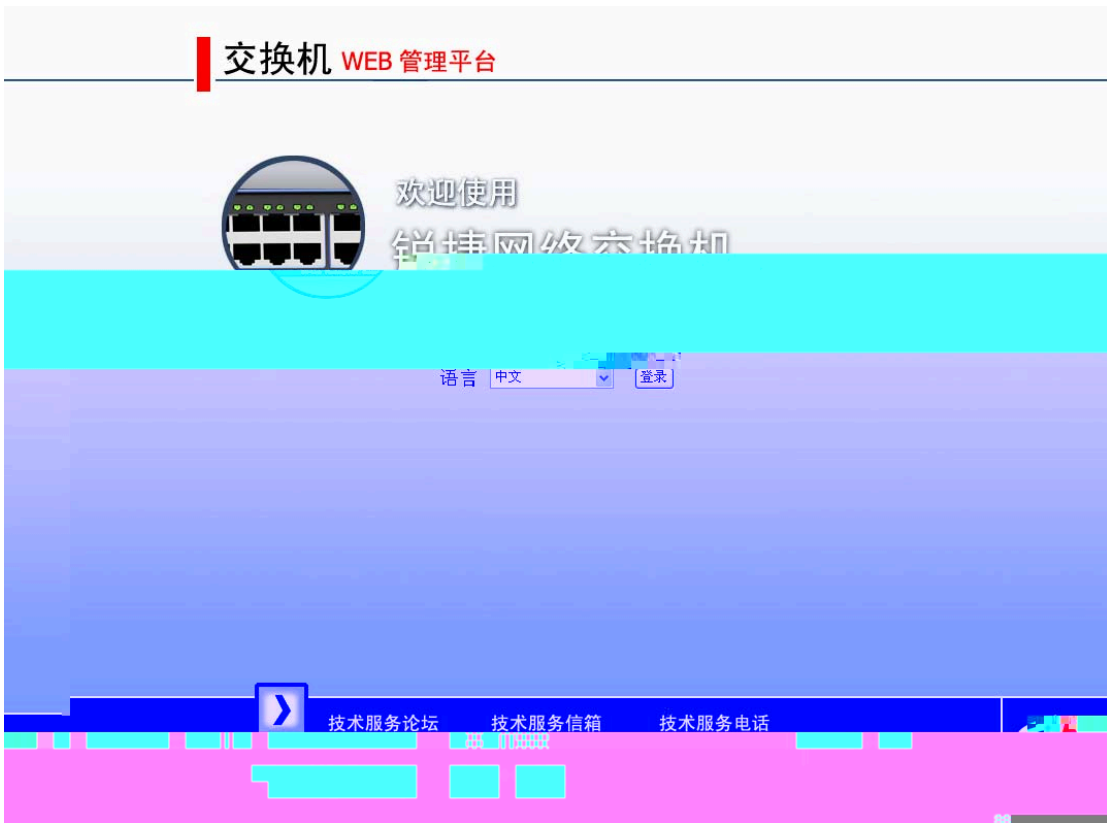

锐捷网络交换机Eg960


01-2 锐捷网络

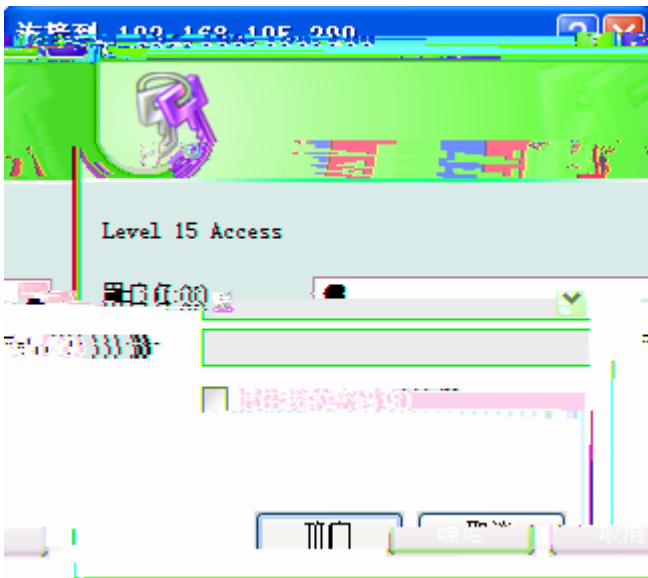

A

W

S

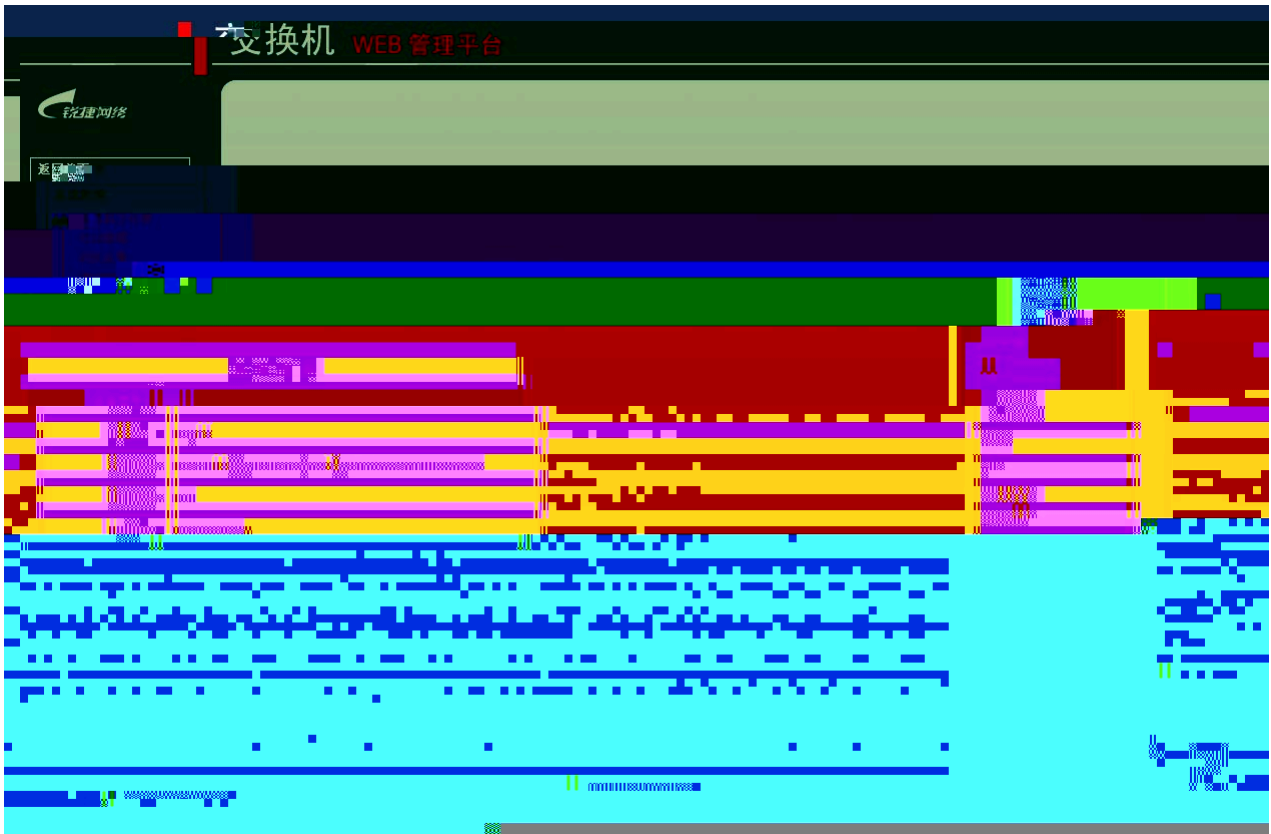


1.5

1.5.1 IP

EE9 IP A5BSA\$6N

x6 IP A5BNIM6Ö

Öl-4 x6 IP A5B

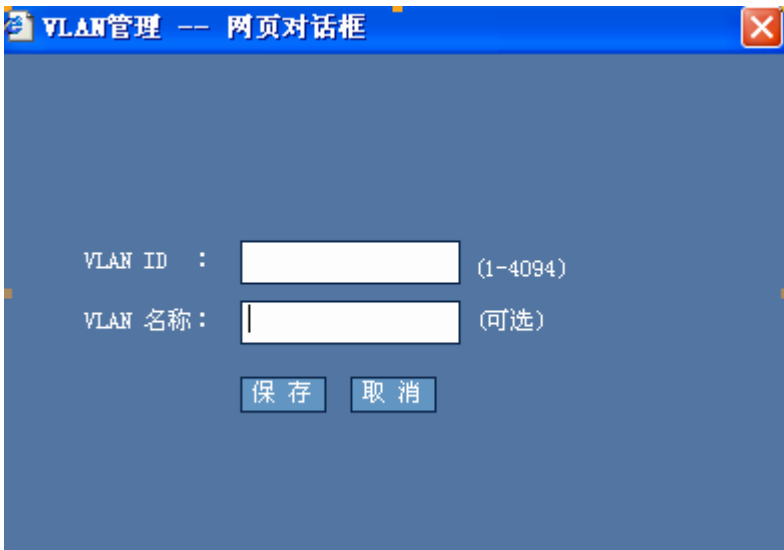

9 VLAN ID ` VLAN 5B8X
NIM6


VLAN 10

VLAN 10

80p0b8b,X VLANE,h,883G5BÄ

0p05B,X VLANEn,880G5BNIM6Ö

01-8 Ä VLAN

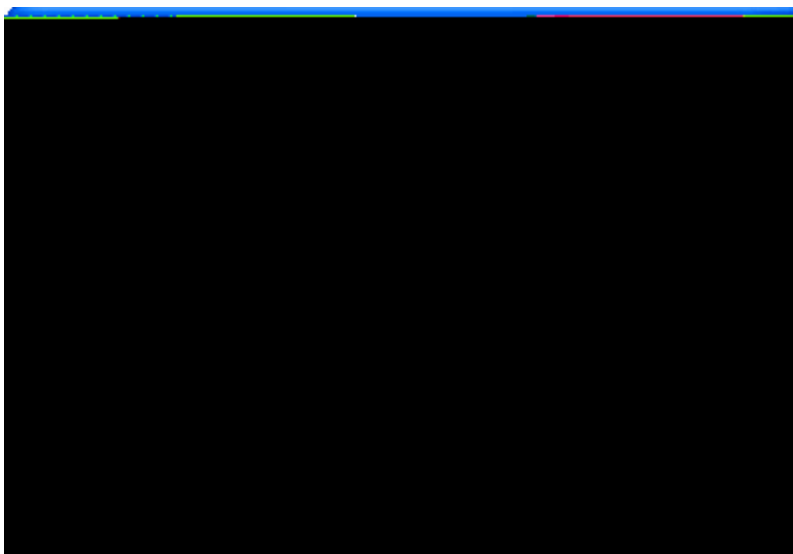


0Ä VLAN ,880G5BÄSÜ
1NIM6

VLAN

6 VLAN NIM6

01-9 6 VLAN

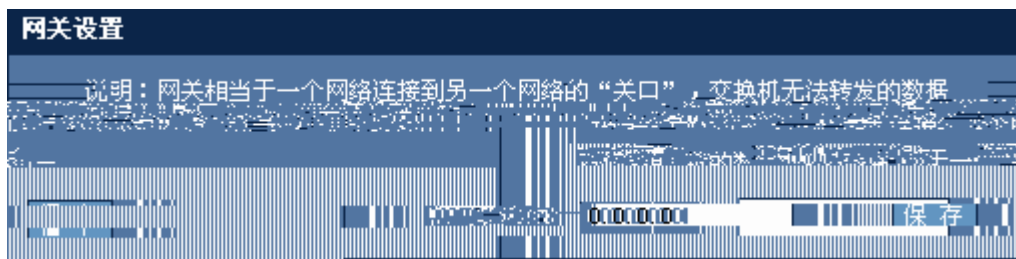

G5BA0

Vpx6G5BZ0ENIM605B,00p0A5B,00
 Eg9,00 IP 00G5B0

IP 00

1.5.4

EE9NM00SA60

00A5BNIM60

01-11 00A5B



G5BAÙ

AÉYÄ àEÙ, ÒM6, ÒG5BÙ, ÒG-Ù

EóA'À, 1² â à Ö òÊEg 9L\$EóÖ {0À=B P•6K', Ú à?äÓbÅE ÝJ, sG!5B*ó È

1.5.6

EE9NM6.ÜA6

6.Ü5BNIMÖ

Ö1-13 6.Ü5B



G5BA


G5B651

VpG5B651, XM, G5BA

G5B6.Ü

VpÜM6

Ö1-14 Ü

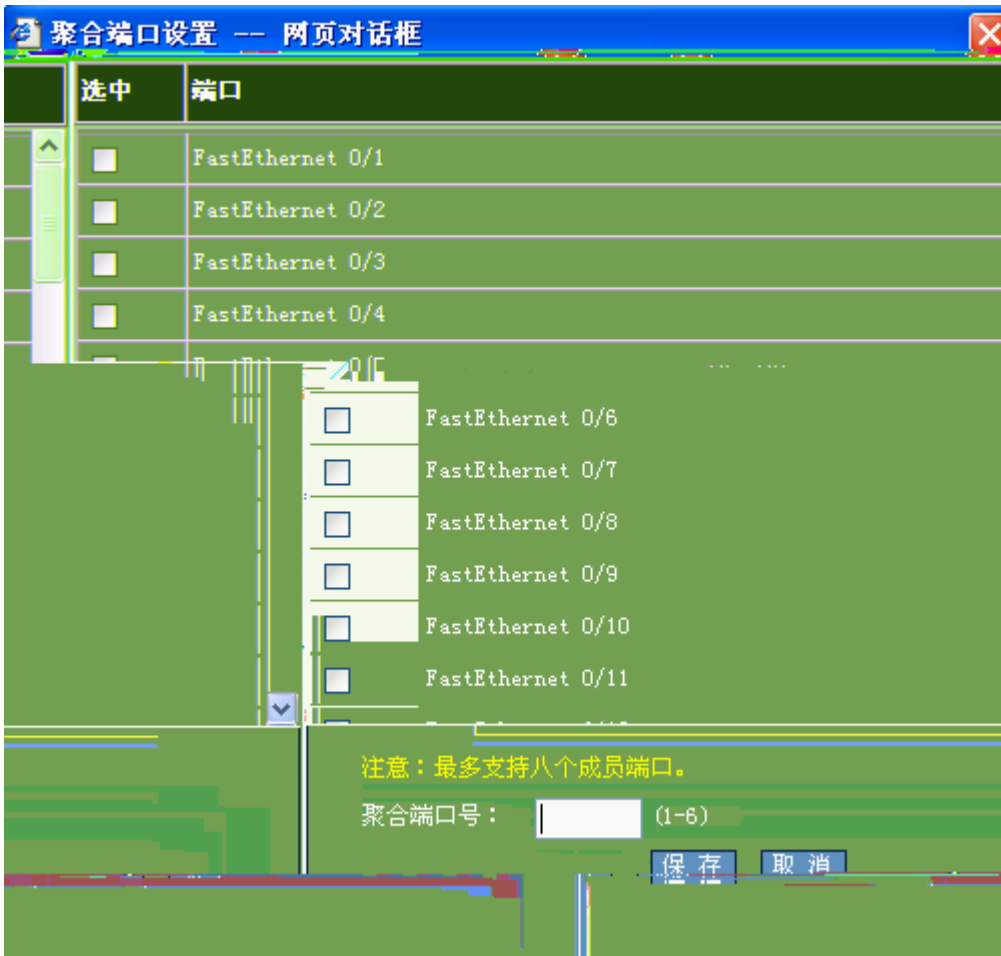

8E9NM0A5BSA6N
 ,0A5BNIM6O

0i-15 0A5B

Vp0686.0AE,h6.0M6,KEB\$G5BA

1.5.7

EE9NM0A5BSA6N

0A5BNIM6O

0i-15 0A5B

端口设置

注意：若选择的参数该端口不支持，对应的参数设置将不生效！

端口：

状态： 双工： 速率： 流控：

描述：

端口	状态	双工	速率	流控	描述
G10/1	Down	Half	10	On	-
G10/2	Down	Half	10	On	-
G10/3	Down	Full	1000	Off	-
G10/4	Down	Auto	Auto	Off	-
G10/5	Down	Full	100	Off	-
G10/6	Down	Auto	Auto	Off	-
G10/7	Up	Full	100	Off	-
G10/8	Down	Auto	Auto	Off	-
G10/9	Down	Full	100	Off	-
G10/10	Down	Auto	Auto	Off	-
G10/11	Down	Auto	Auto	Off	-
G10/12	Down	Auto	Auto	Off	-

G5BA0

A5B0 G5B0 A5B0 G5B0 E5A0 A5B0

1.5.8 DHCP

EE9NMDHCP 4SAs6A

DHCP 4A5BNIM6O

O1-16 DHCP 4»





G5BA0

DHCP Snooping A5B

00 DHCP Snooping s6 DHCP Snooping 0 MAC s6E, K, G5BA

DHCP Snooping 0A5B

A5B, K, G5BA, G5B, C, p, 0, 8, 0, A


A5B, K, G5BA

1.5.10 IGMP Snooping

EE9NMIGMP Snooping SA6

IGMP Snooping A5BNIM6

0i-18 IGMP Snooping A5B

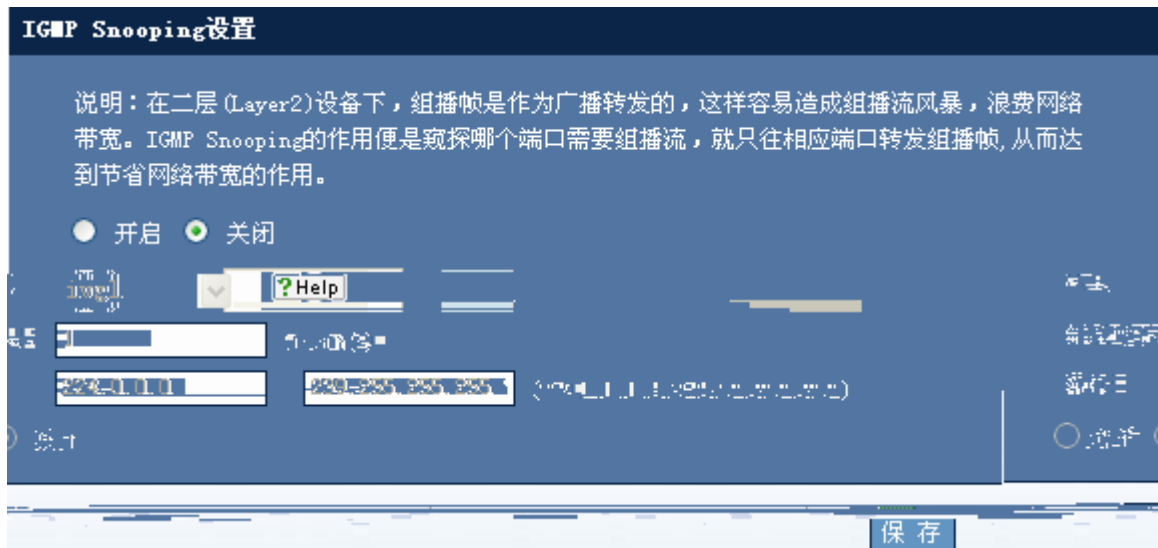

G5BA

Vp0 IGMP Snooping s6

ivglÃ svglÃ

ivgl-svgl

svglÃ ivgl-svgl

IP 8

5Bp0GK


IGMP Snooping s6

1.5.11 STP

EE9NMSTP A5BSA6

STP A5B,NIM6

0i-19 STP A5B

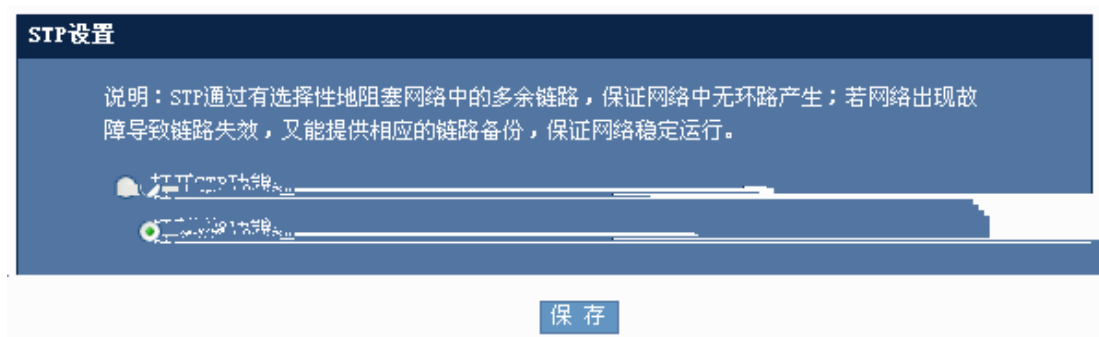

G5BA

E0 STP s6


STP s6

1.5.12 SNMP

EE9NMSNMP 10A6A

SNMP 10IM60

01-20 SNMP 105B

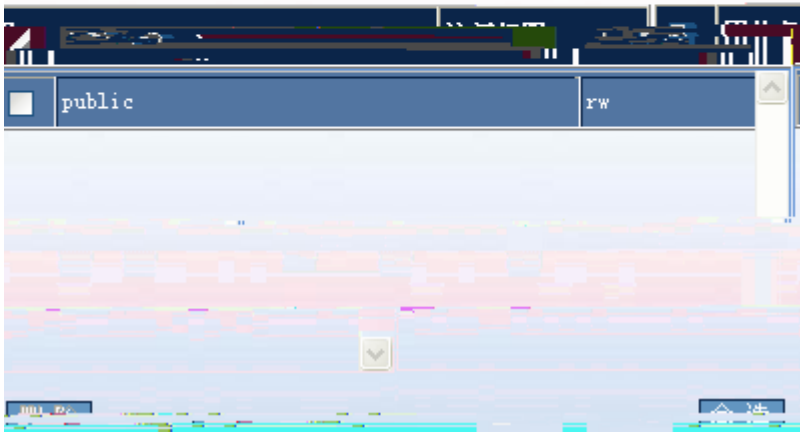

G5BA0

Vp0 SNMP 10A60

SNMP 10A60

,G5B0p0GK

SNMP 10A60

SNMP 10A60

Vp06805B, 068, Mh, 08\$G5BA

1.6

1.6.1 ARP

EE9NML5% ARP P6A6A

L5% ARP PIM60

01-21 L5% ARP Pk



G5BA0


AÉ0G5B,00g950#G5B005B50Zp068G5B,X
 50AÉ068,00h,008,G5BÄ

1.6.2 ARP

EE9NML ARP PBA6N

L ARP PA5BNIM6Ö

Ò1-22 L ARP PA5B

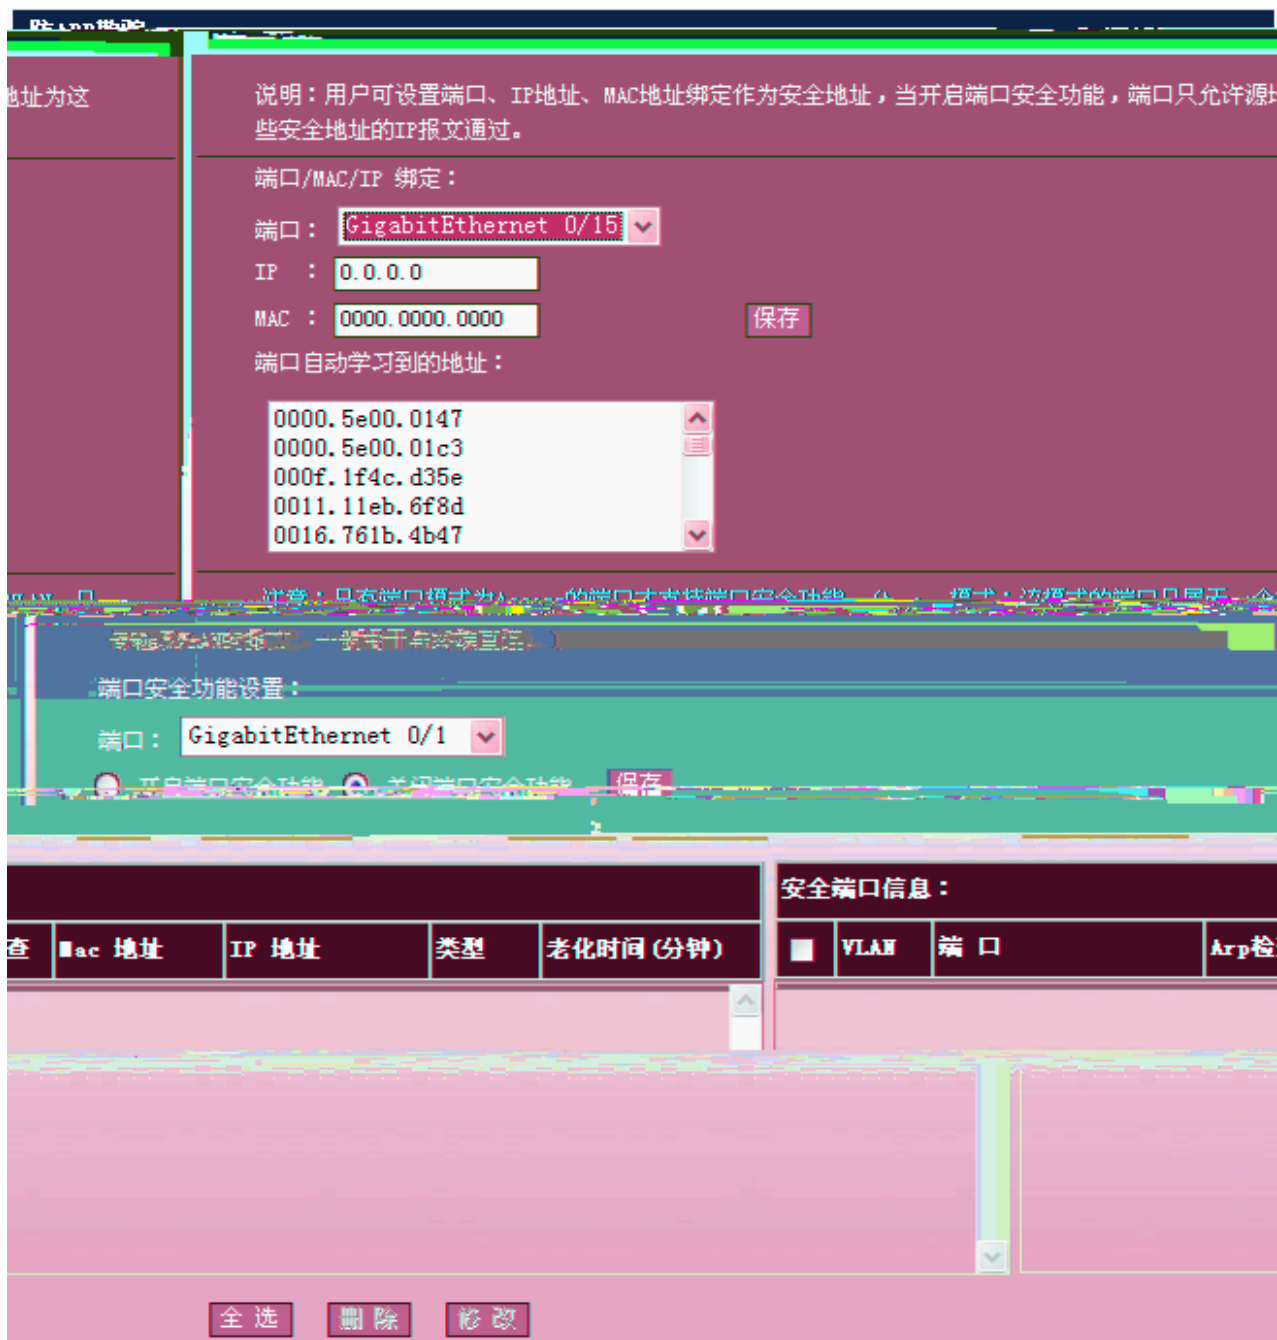

G5BA

MAC/IP 4

VpG5B0 MAC/IP 4 E G5B, G5BQ IP \ MAC G5BpE,X

0 MAC 0A4,02E GigabitEthernet 0/15

0A,X MAC A

06 N5B


E G5B, 0pA0 0p06 N5B

6 N5B 06 A

06

Vp0000 A5000, 5B-M000

01-23 00

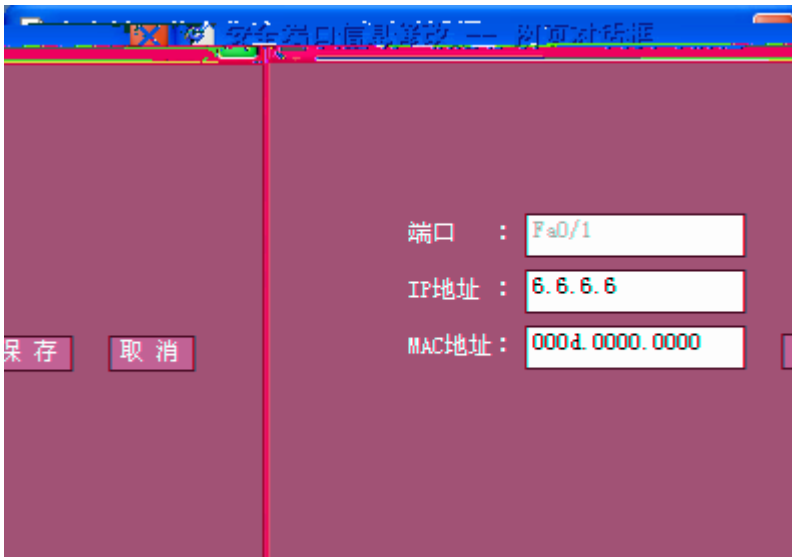

0000 G5B0p0000-M-0

1.6.3 ARP

0000MARP A5BSA000

ARP A5BNIM00

01-24 ARP A5B



00

VpE, 0000
E0

ARP 0000AxF000


ARP 0000

1.6.4 ACL

0000MACL SA000

ACL A5BNIM00

01-25 ACL A5B



/ ACL ð

G5BAÙ

ACL ð/M6VÙpÙ1Ù

ACL ,XÙÙÙÙ

ACL ËÙ5

ACL Ë

Ù¹ ACL ,X ACEÙpÙ68Ù

ACEÙÙÙ,ÙÙÙÙG5BÙpÙ68H5

ACLÈ

ACEÙÙ

ACEÙÙÙG5BÙ


ACL G5B

VpÙG5BÙ IP AÙÙ5BÙ

IP AÙÙ5BÙ

IP AÙM6Ù

Ù1-26 G5BÙ IP AÙ

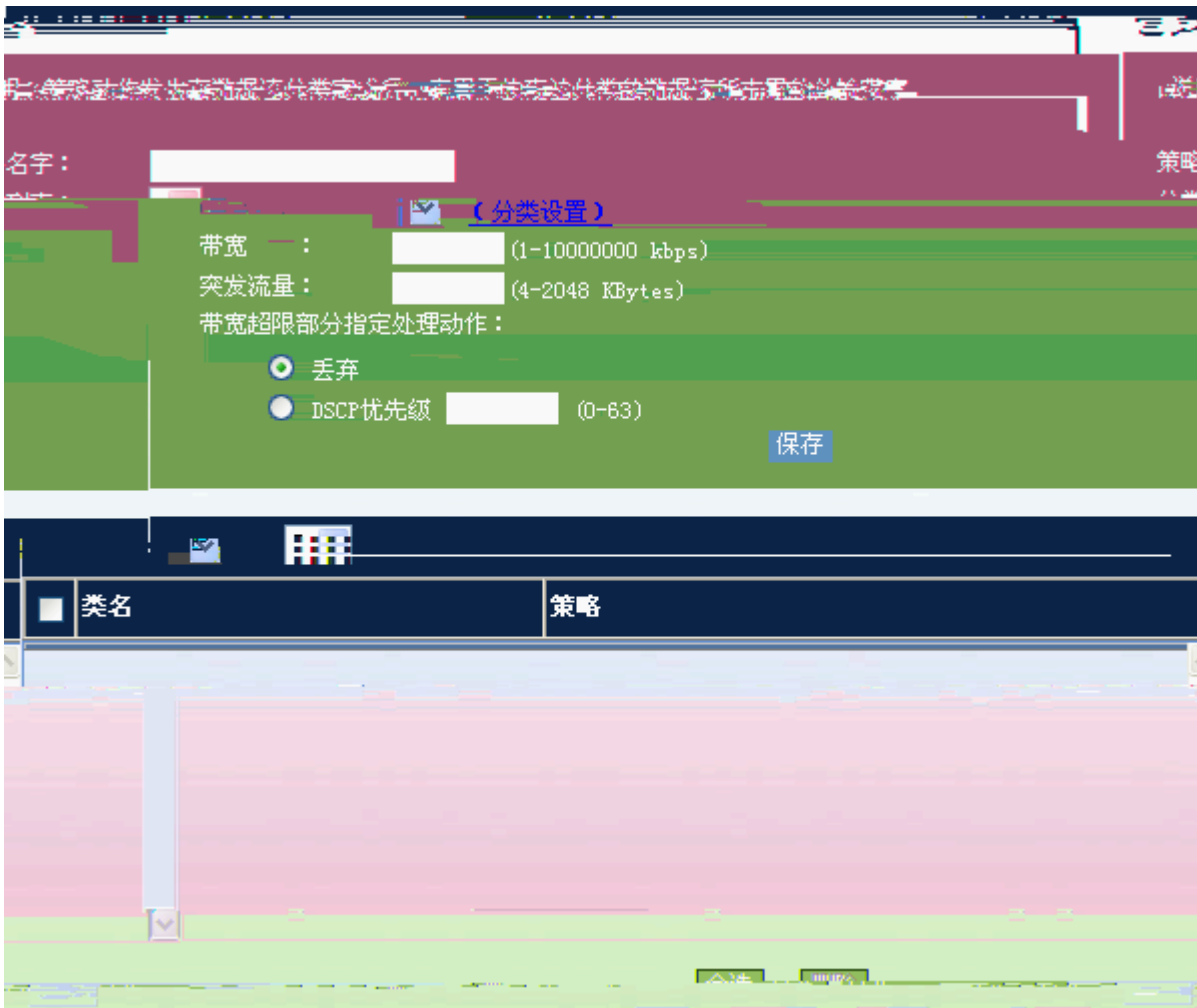

0

1005B10A

05B, 000N0A5B0005BNIM6E05BA

0Eg968A

0U0Eg968A0IM6Eg9A

0M500p0 DSCP 4Eg968A

A5B05G5BA

Vp068A5B09E0X10E10, X46068, MMY

L85G5BAp068100E085G5BA

0

1.7.3

0

A5BNIM60

01-3 1#5B

流设置

说明：应用策略设置对端口的输入或输出流进行限制。

端口： FastEthernet 0/1

策略列表： (策略设置)

限速方向：
 输入限速
 输出限速
 保存

端口	方向	策略名	信任模式	COS
<input type="checkbox"/> FastEthernet 0/1	-	-	-	-
<input type="checkbox"/> FastEthernet 0/2	-	-	-	-
<input type="checkbox"/> FastEthernet 0/3	-	-	-	-
<input type="checkbox"/> FastEthernet 0/4	-	-	-	-
<input type="checkbox"/> FastEthernet 0/5	-	-	-	-
<input type="checkbox"/> FastEthernet 0/6	-	-	-	-
<input type="checkbox"/> FastEthernet 0/7	-	-	-	-
<input type="checkbox"/> FastEthernet 0/8	-	-	-	-
<input type="checkbox"/> FastEthernet 0/9	-	-	-	-
<input type="checkbox"/> FastEthernet 0/10	-	-	-	-
<input type="checkbox"/> FastEthernet 0/11	-	-	-	-

0

05E0G5B,0A

10E0h0A0A0E0N0A5B10A

L0E0E0A

A5B0G5B0p0680A5B0E068,MMh,00y

SG5BA

1.8

1.8.1

EE9NM2HPSA6

2HPSNIM6

01-32 2HPS

系统信息	
设备型号：	S2924G
主机名：	Ruijie
软件版本：	RGOS 10.2.00(3), Release(30355) (Tue Mar 11 19:23:04 2008 - 23195A44470348C)
系统时间：	2008-03-11 19:23:04
系统日期：	2008-03-11
系统时间：	2008-03-11 19:23:04
系统日期：	2008-03-11

1.8.2

EE9NMG5BSA6

G5BNIM6

01-33 G5B

```

当前配置
Building configuration...
Current configuration : 12931 bytes

!
version RGNOS 10.2.00(3), Release(30355) (Tue Mar 11 19:23:04 2008 -
23195A44470348C)
!
!
!
!
vlan 1
 name vlan1
!
vlan 2
!
vlan 3
!
vlan 4
!
vlan 5
!
vlan 6
!
vlan 7
!

```

1.8.3

EE9NM00A6N

00IM60

01-34 00

端口状态

端口	状态	Vlan	双工	速率	端口类型
FastEthernet 0/1	down	1	Unknown	Unknown	copper
FastEthernet 0/2	down	2	Unknown	Unknown	copper
FastEthernet 0/3	up	1	Full	100M	copper
FastEthernet 0/4	down	900	Unknown	Unknown	copper
FastEthernet 0/5	down	1	Unknown	Unknown	copper
FastEthernet 0/6	down	1	Unknown	Unknown	copper
FastEthernet 0/7	down	1	Unknown	Unknown	copper
FastEthernet 0/8	down	1	Unknown	Unknown	copper
FastEthernet 0/9	down	1	Unknown	Unknown	copper
FastEthernet 0/10	down	1	Unknown	Unknown	copper

刷新

1.8.4

EE9NM00A6N

00IM60

01-35 00

端口运行状态	
端口	带宽占用
FastEthernet 0/1	0%
FastEthernet 0/2	0%
FastEthernet 0/3	0%
FastEthernet 0/4	0%
FastEthernet 0/5	0%
FastEthernet 0/6	0%
FastEthernet 0/7	0%
FastEthernet 0/8	0%
FastEthernet 0/9	0%
FastEthernet 0/10	0%


刷新

1.8.5



0AQNIM6Ö

ÖI-36 0AQC

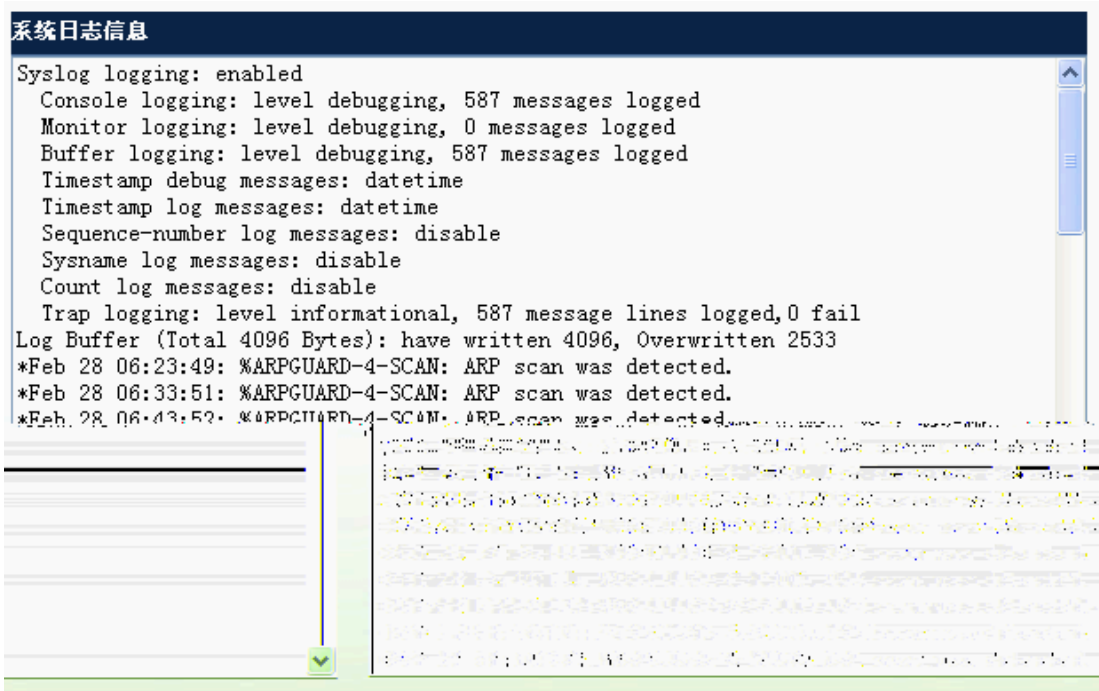


1.9

1.9.1 Ping

EE9NMPingSAs6Ñ

Ping NIM6Ö

Òt-38 Ping

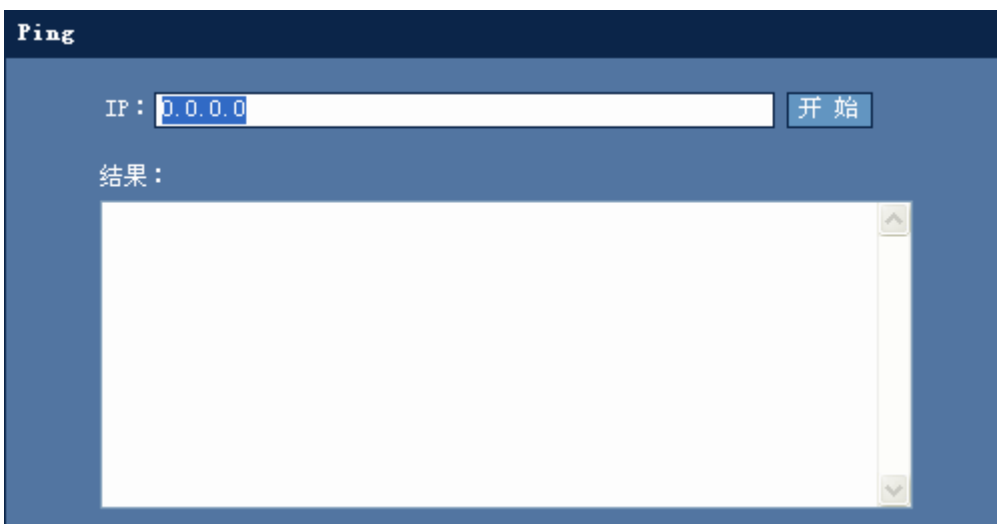

0

AËg9

IP 0p

IP 5NIM6Ú


Ping C0ÑÄ

1.9.2 Telnet

EE9NM Telnet SA6

Telnet NIM6

01-39 Telnet

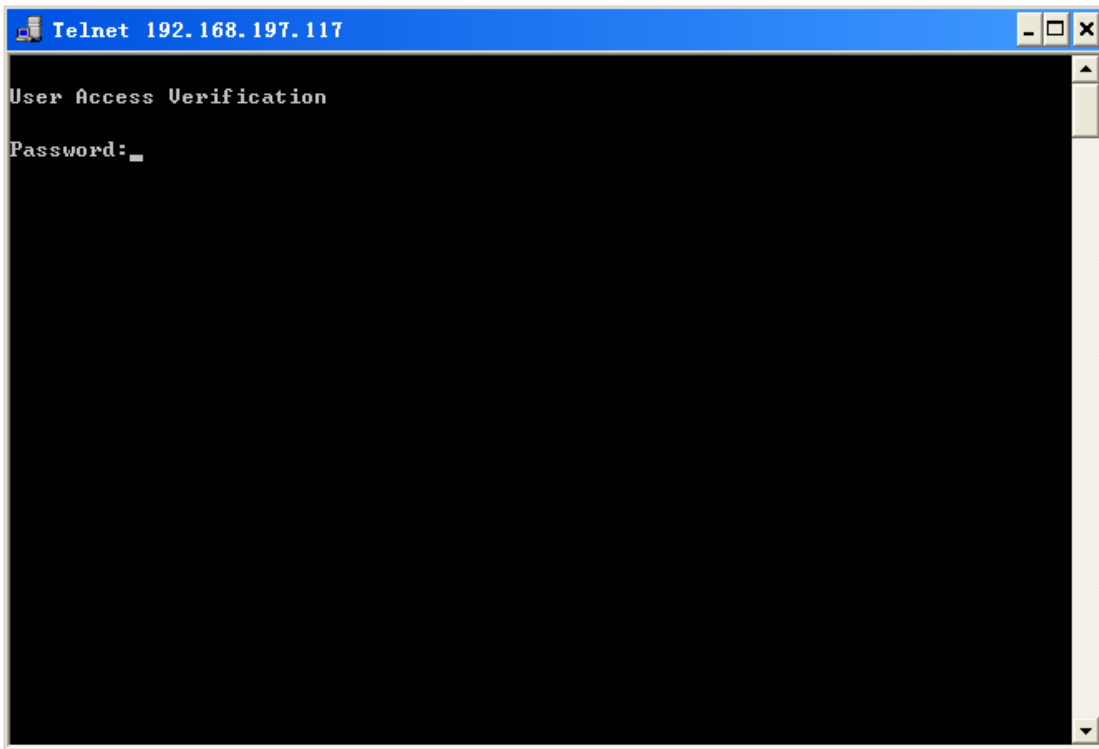

0

,9NM Telnet

0

Telnet s6

PC 0

Telnet 00


PC ,X Telnet 0

1.9.3

0

0NM6

01-40 0

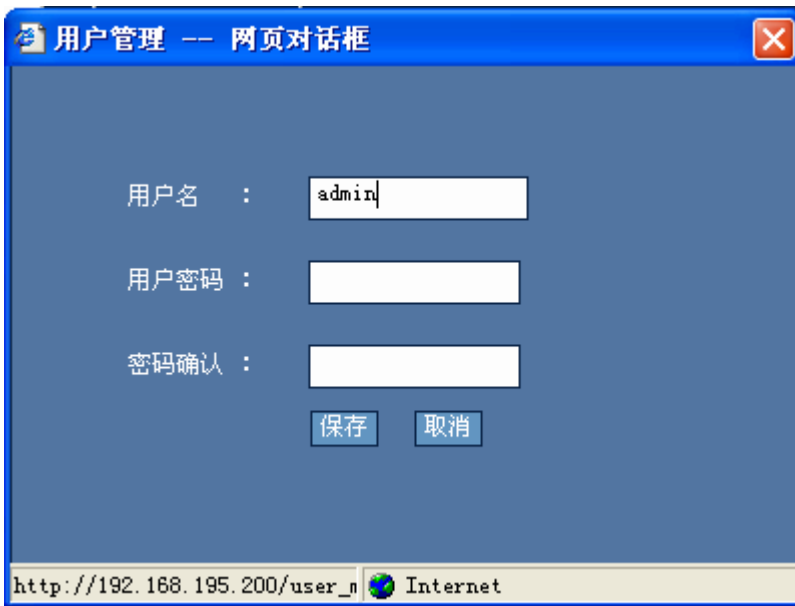

1.9.4

修改Enable口令

注意：如果您设置了新的Enable口令，则在设置之后使用新口令重新登录。

新口令 :

新口令 :

确认新口令 :

保存

修改Telnet登录口令

新口令 :

确认新口令 :


保存

G5BA0

 A Enable ;

Vp0A Enable A Eg9 G5BA0

01-44 ,PA±

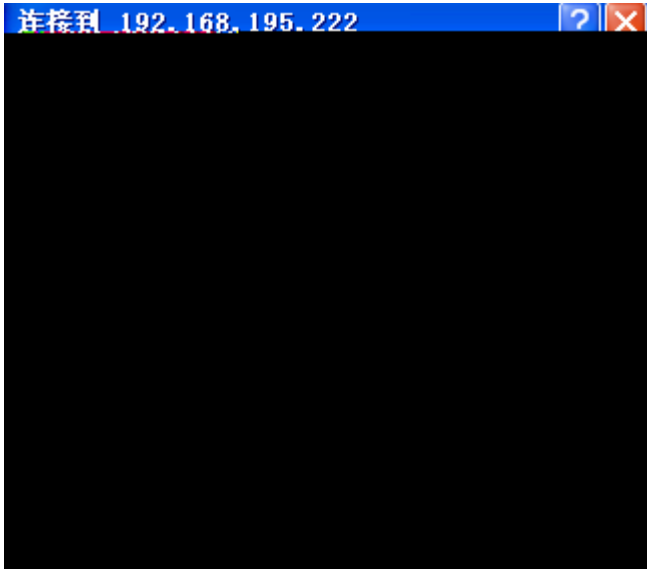

D

 A Telnet ,D

Vp0A Telnet A Eg9 G5BA0

1.9.5 /

EE9NM0 05BSA6A

0/ 05BNIM60

01-45 0/ 05B



0

0000X config.text 0Eg9 TFTP 0X IP` TFTP 00G!


5B0

1.9.6 WEB

EE9NMWEB 0A5BSAs6A

WEB 0A5BNIM60

01-46 WEB 0A5B

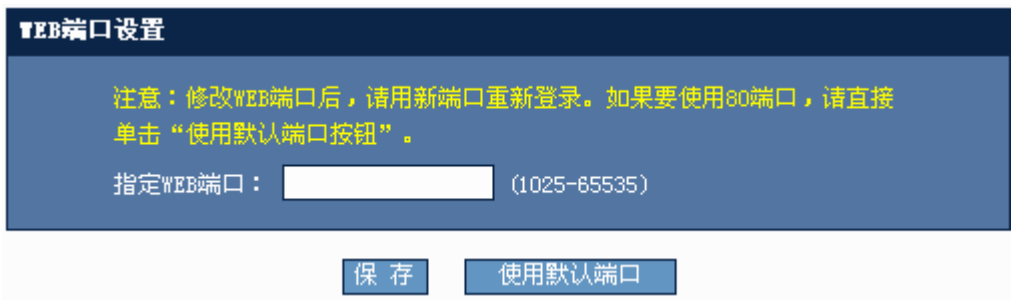

0

AËg9000G5B0A5BA000,00ADÄ 8080Ë

AÜ IP Ö 192.168.1.1 0ü http://192.168.1.1:8080 ,00p06Ax0A0Ax0X

0 http://192.168.1.1 G;0

1.9.7

EE9NM24SA6N

244NIM6Ö

Ö1-47 244³

Local 0x0A

A45BV0

E9 config a

01

01

0 WEB A

~~MLFRQ~~ DWLRQ
~~UHQ~~ FRQ ~~U~~ DWLRQ ~~WHV~~

 MUVLRQ 265H0DVH:HG0D870
 0Q
 XHUQPHDGPLQSDVVZUGDGPLQAxA0
 XHUQPHDGPLQULYOH:15040
 QVHUYFHSDVVZUGHEUSWLRQ
 LSKWSDXKQ LFDWLRQFDQ00FD0AxA•

 HQE0VHUYFH0EVHUMU0%

 LQHUIDFH9/\$
 LSDGGUHVVA003
 QVWGR0

 Q0FRQ
 Q0VA
 Q0IQ

 HQ

0 Enable 0AxA•

5XMLHFRQVR000RQJ
~~MLFRQ~~ DWLRQ
~~UHQ~~ FRQ ~~U~~ DWLRQ ~~WHV~~

 MUVLRQ 265H0DVH:HG0D870
 0Q
 QVHUYFHSDVVZUGHEUSWLRQ

 HQE0SDVVZUGDGPLQ00000AxA0
 HQE0VHUYFH0EVHUMU0%

 LQHUIDFH9/\$
 LSDGGUHVVA003
 QVWGR0

 Q0FRQ
 Q0VA

BIQ

HQ