




RG - AP130(W)

ř 6 v χ Y4135

copyright © 2018

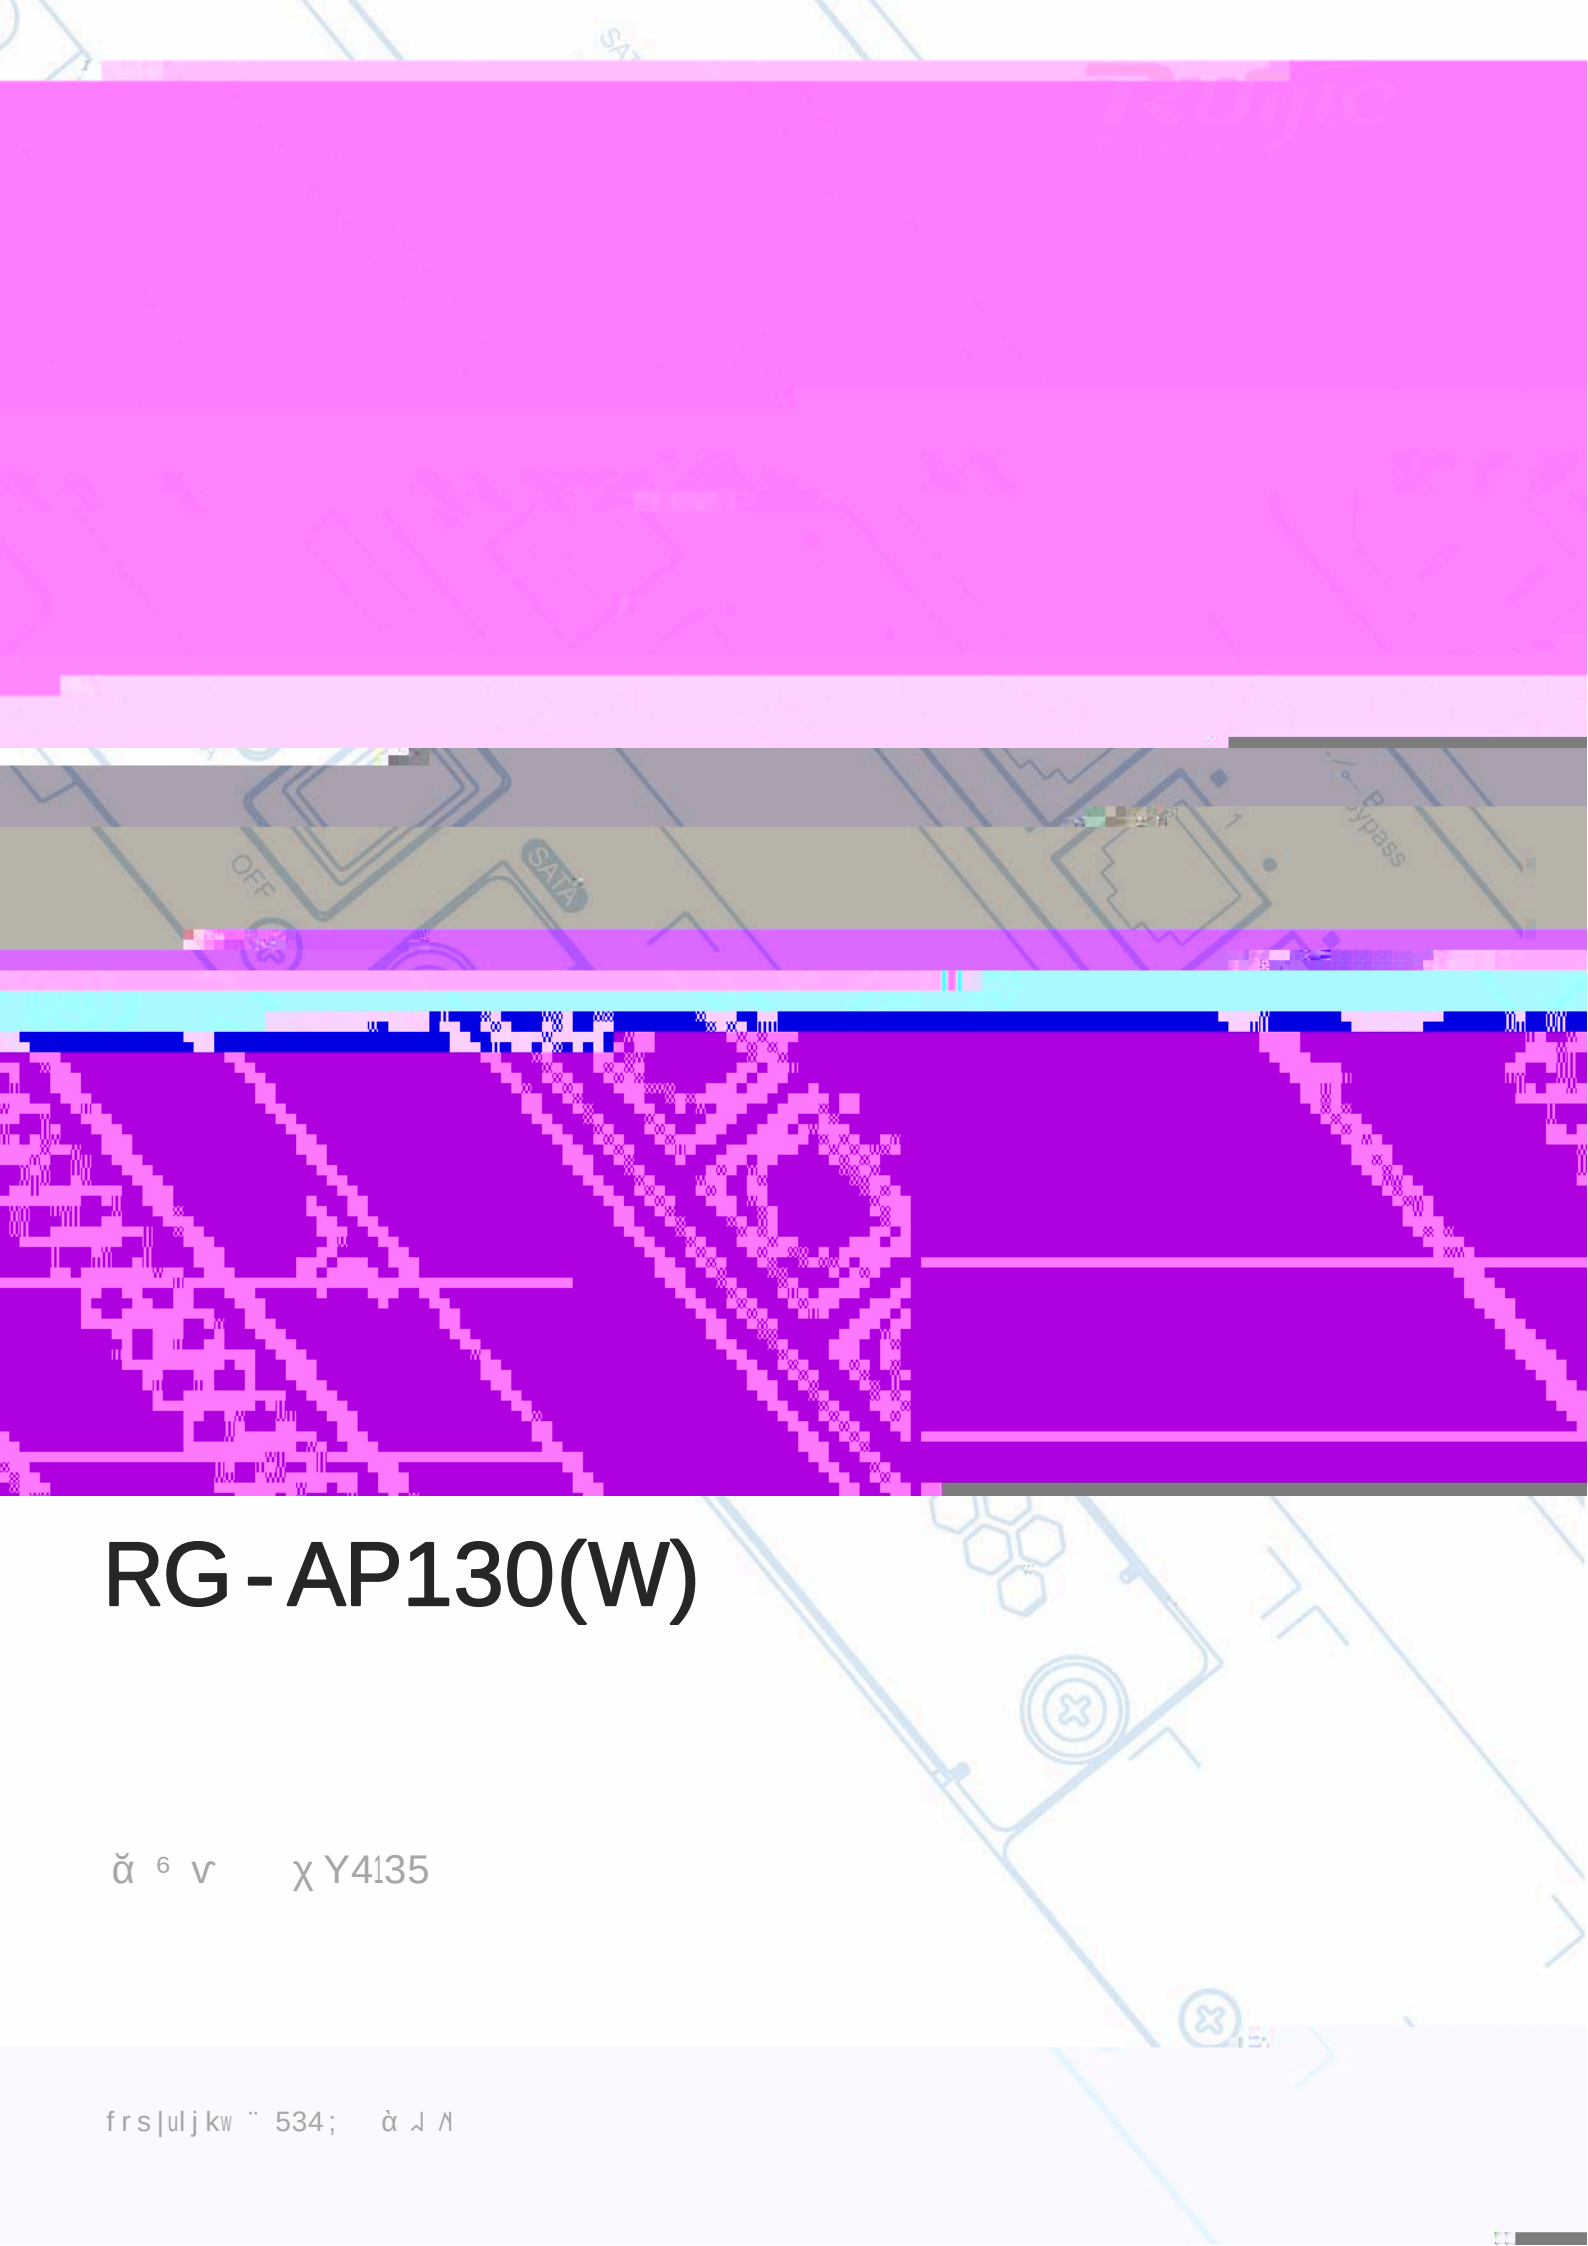

<http://www.ruijie.com.cn/>

<http://webchat.ruijie.com.cn>

<http://www.ruijie.com.cn/service.aspx>

7 × 24

4008-111-000

<http://bbs.ruijie.com.cn/portal.php>

1

1.1

RG-AP130(W)	WallAP	RG-AP130(W)	86	802.11ac	86mm
	IP				
RG-AP130(W)		802.11ac		802.11a/n/ac	802.11b/g/n
5GHz		866.5Mbps	2.4GHz	300Mbps	AP
1166.5Mbps			10/100/1000Base-T	(WAN) 4	10/100Base-T
(LAN)					
RG-AP130(L)					
RG-WS					

1.2

1.2.1 RG-AP130(W)

1.2.1.1 RG-AP130(W)

	2.4G 2 × 2MIMO 5G 2 × 2MIMO
	2.4G 802.11b/g/n 5G 802.11a/n/ac
	802.11b/g/n 2.4G ~ 2.4835GHz 802.11a/n/ac 5G 5.150 5.350GHz 5.47 5.725 5.725 5.850GHz (
	3.5dBi
	2
	2.4G 300Mbps 5G 867Mbps 1.167Gbp
	OFDM BPSK@6/9Mbps QPSK@12/18Mbps 16-QAM@24Mbps 64-QAM@48/54Mbps DSSS DBPSK@1Mbps DQPSK@2Mbps and CCK@5.5/11Mbps MIMO-OFDM BPSK QPSK 16QAM 64QAM and 256QAM
	11b/g -94dBm(1Mbps) -74dBm(54Mbps) 11a -90dBm(6Mbps) -74dBm 54Mbps 11nHT20 -72dBm@MCS7 -68dBm@MCS15 11ac HT20 -90dBm MCS0 , -65dBm MCS8

	11ac HT40 -85dBm MCS0 , -60dBm MCS9 11ac HT80 -82dBm MCS0 , -58dBm MCS9
	≤ 100mw 20dBm
	1dBm
	116mm * 86mm *39mm
	0.19kg
	4 10/100/1000Mbps 1 RJ-45 (RJ-11) 1 10/100/1000Mbps 1 RJ-45 RJ-11
	1 Micro USB Console
	PoE 802.3af/802.3at
	≤ 8W
	0°C 45°C
	-40°C 70°C
	5 95
	5 95
	86
	86
	IP41
	GB4943 IEC 60950-1
EMC	IEC61373 GB9254 EN301489 EN50121 EN50155
	EN300 328 EN301 893
	EN300 328 EN301 893
MTBF	>250000H

1.2.1.2 RG-AP130(W)

RG-AP130(W) 2 () 1 WAN 4 LAN

1-1 RG-AP130(W)



1-1

PoE/UpLNK

1000/100/10BASE-T

(WAN)

PoE

PassThrough

PassThrough

1-2 RG-AP130(W)



1-2

MicroUSB

(Console)

PassThrough

2

2.1

RG-AP130(W)

AP

т ь , й в ъ ђ з ы ї ђ ђ ђ

2.2

AP

500m

2.3

0 45
-40 70
5% 95%

2.4

RG-AP130(W)

2-1

2-1

μm	0.5	1	3	5
(/)	1.4×10 ⁷	7×10 ⁵	2.4×10 ⁵	1.3×10 ⁵

RG-AP130(W)

2-2

2-2

	mg/m ³	mg/m ³
SO ₂	0.2	1.5
H ₂ S	0.006	0.03
NO ₂	0.04	0.15
NH ₃	0.05	0.15
Cl ₂	0.01	0.3

2.5 EMI

2.6

2-3





RG-AP130(W) Ȳ

0 Ȳ ȳ ȳ

Ȳ

ȳ




Ȳ


ȳ ȳ

3.3

1. 将 AP 天线安装在天花板上。


2. 将天线固定到天花板上。

3. 将 AP 天线固定到天花板上。

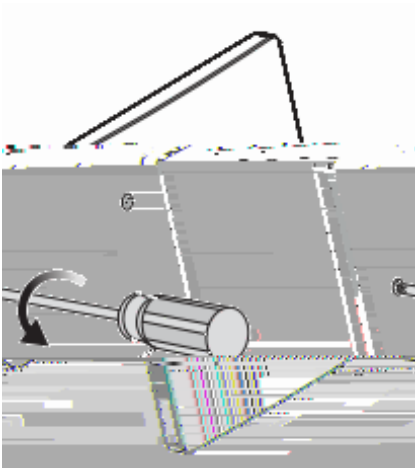


1

86

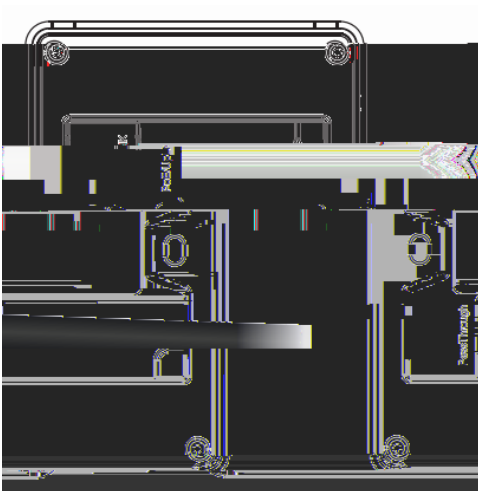

2


UpLNK PassThrough

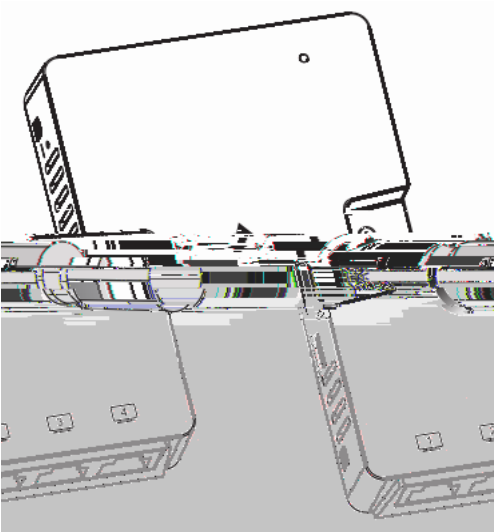

3


RG-AP130(W)

86

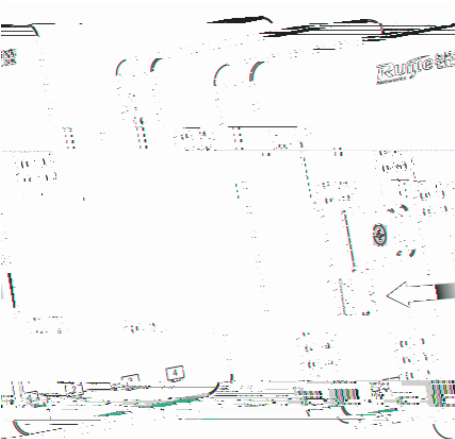


4

RG-AP130(W)

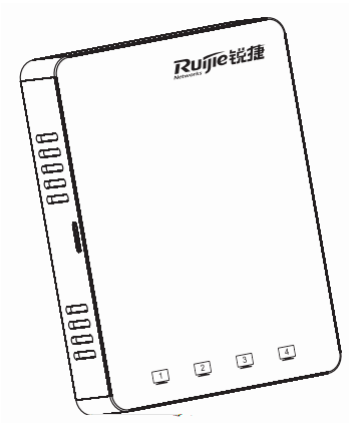

4-2 LED

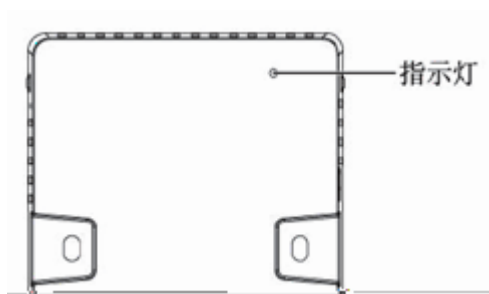

4.3 /

4-3

4-3



4.3.1

1mm

2S


4.3.2

1mm

3S

5

5.1

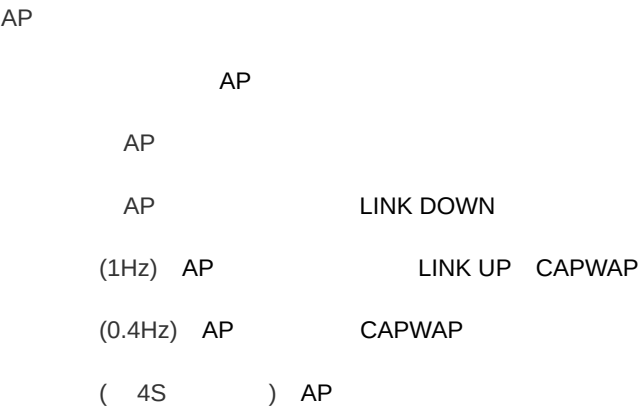

5.2


RG-AP130(W) AP AC

5.3

RG-AP130(W) 3.3 y Ũ ĩ y 0 Ũ

6

6.1

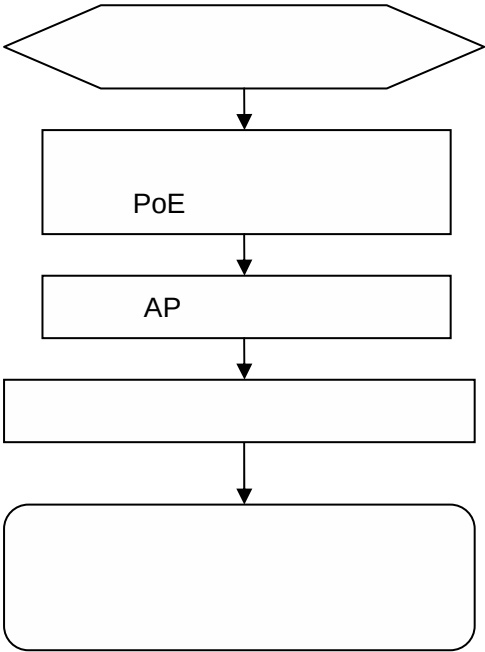

6.2

1

PoE 802.11af

2

LED

3

AP AP

1)

İ 5
§ AP

4)

AP

—

RG-AP130(W) 1 0 € 0 \$ 1 H 9 ¢

A —

1000BASE-T/100BASE-TX/10BASE-T

1000BASE-T/100BASE-TX/10BASE-T				MDI/MDIX Crossover	
	1000BASE-T	IEEE 802.3ab		100-ohm 5	UTP
STP		STP	100	1000BASE-T	4
	4	1000BASE-T		A-1	
A- 1	1000BASE-T		, ÒA-3 Ò		

中繼器	且連線	發射器	父叉線
1 IRD+	1 IRD+	1 OTD+	1 IRD+
2 IRD-	2 IRD-	2 OTD-	2 IRD-
3 OTD+	3 OTD+	3 IRD+	3 OTD+
4 OTD-	4 OTD-	4 IRD-	4 OTD-