




1	
2	5
3	6
4	8
5	11

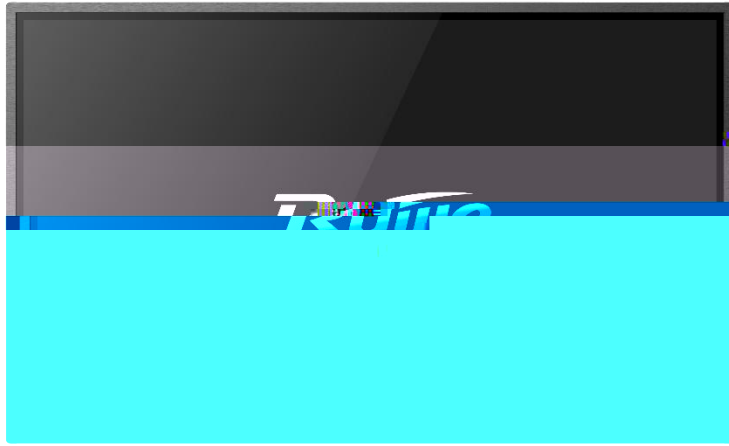

RG-IIB-K75AS/K86AS
1080P 4K A LED

RG-IIB-K75AS/K86AS
178

RG-IIB-K75AS/K86AS

RG-IIB-K75AS/K86AS 7H AG

RG-IIB-K75AS/K86AS
Touch
HDMI

RG-IIB-K75AS/K86AS OPS Windows
Andorid
Android8.0 64
Android
Intel OPS-C CPU

OPS

RG-IIB-K75AS/K86AS OPS
Windows

	RG-IIB-K75AS	RG-IIB-K86AS
	75	86
	16:9	16:9
	3840X2160	3840X2160
	450cd/	400 cd/
	60Hz	60Hz
	178°/178°	178°/178°
MTBF	200000	200000
	20	

VGA in×1

VGA in×1

PC-Aud

	100 V ~ 240 V/AC, 50/60 Hz	100 V ~ 240 V/AC, 50/60 Hz
OPS-C	400W	440W
	< = 0.5W	< = 0.5W
(W*D*H)	1741.7mmx103.4mmx1060.2mm	1995.2mmx111.9mmx1206.3mm
(W*H*D)	1880mmx280mmx1160mm	2140mmx280mmx1340mm
	59.1±1.5KG	76.6±1.5KG
	77.6KG±1.5KG	97.0KG 1.5KG

