

copyright © 2023

-
-
-
-
-
-
-
-
-

<http://www.ruijie.com.cn>

<http://www.ruijie.com.cn/fw/>

7*24h <http://ocs.ruijie.com.cn>

7*24h 4008-111-000

-- <http://www.ruijie.com.cn/special/fw/tool/xryf/>

4008111000@ruijie.com.cn

APP

1.

<>		< >
[]		" " []
>>		[]>>[]

" "



/

3.

1 WEB

1.1



1.2

WEB	WEB


1.2.1 WEB




- (1) WEB PC
- (2) Google chrome 360 qq edge
WEB
- (3) 1600*900 1920*1080


1.3 WEB

1.3.1



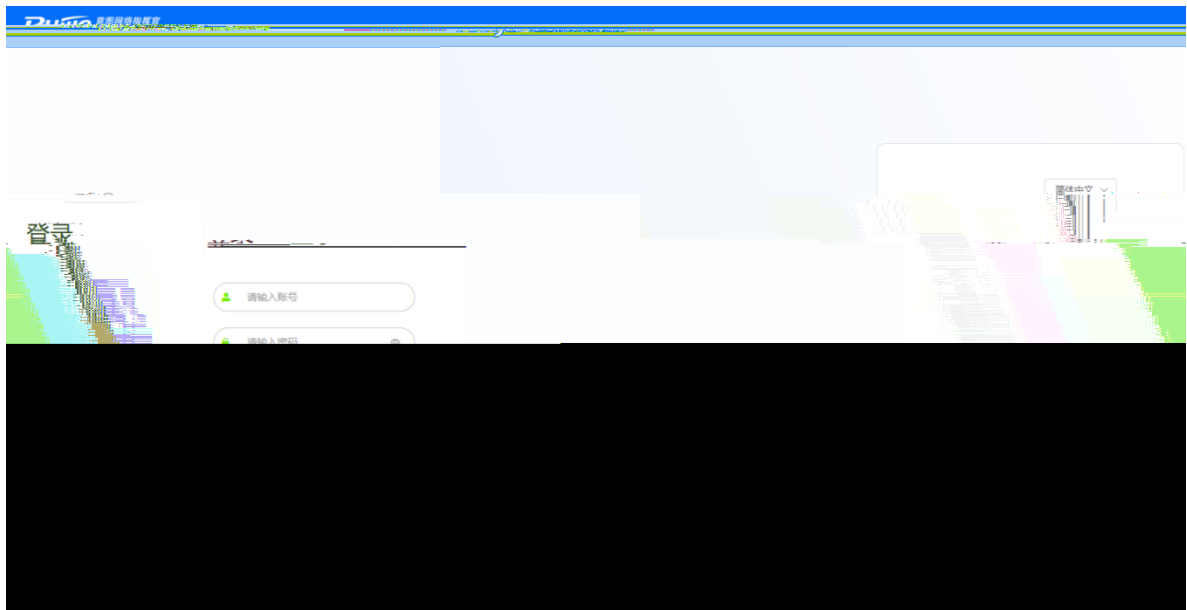


- (1) / admin/admin < >
- (2) < >
- (3) 4008111000
- (4) 5 10
- (5) < >

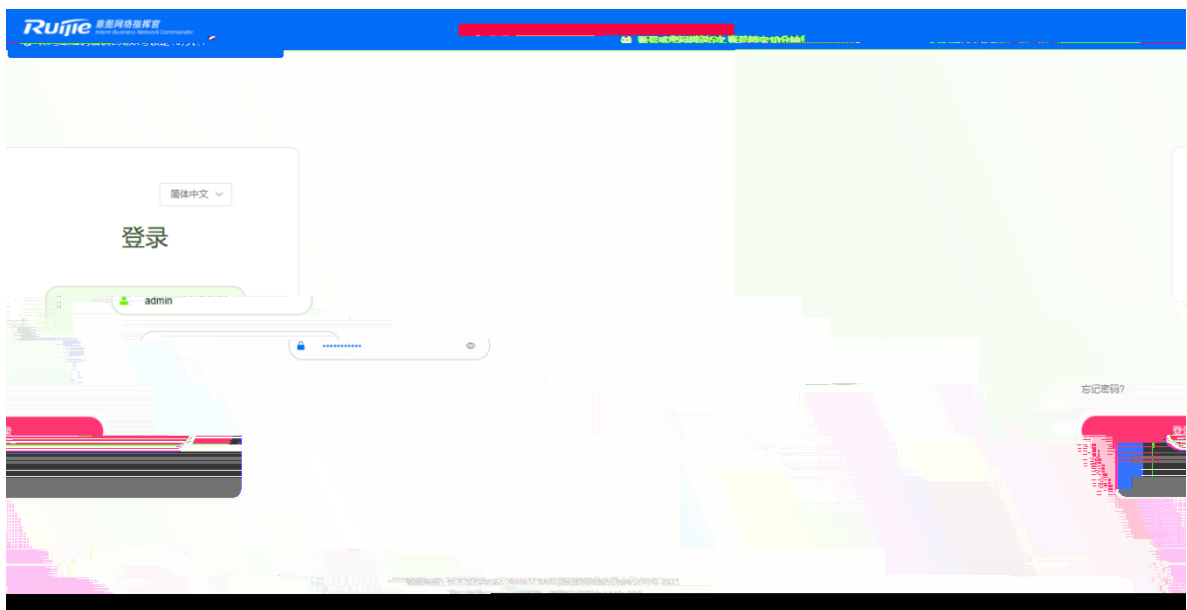

1.3.2

WEB

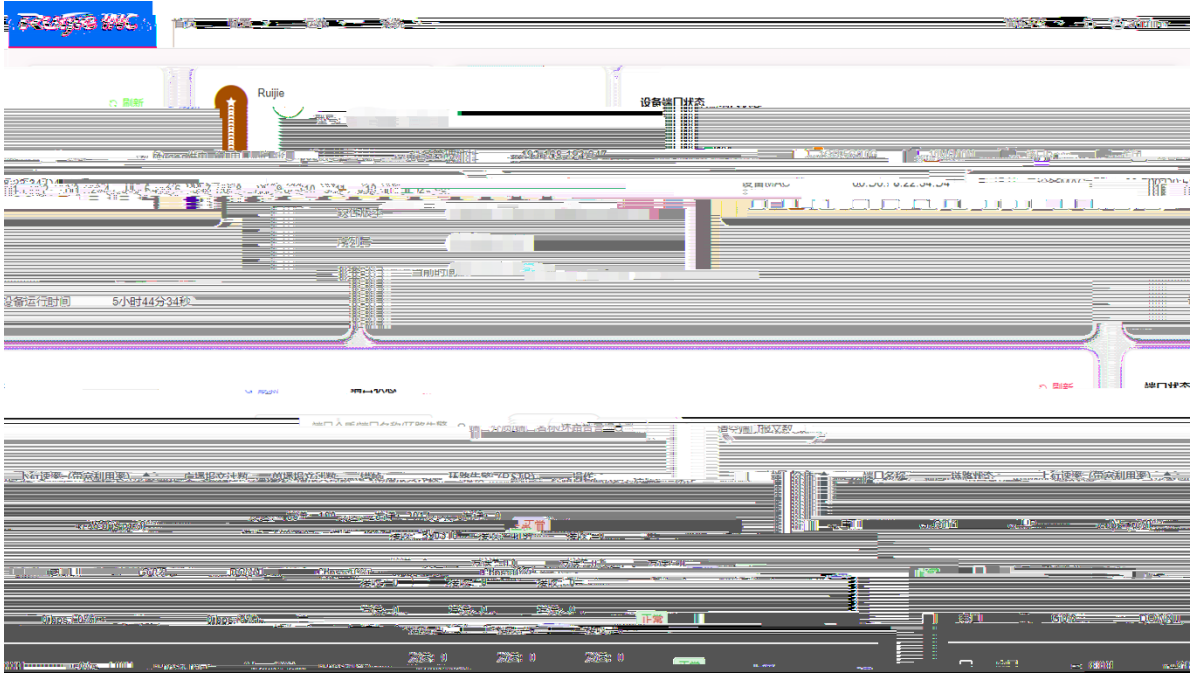

1.

WEB



2.

WEB

1.3.3

1.

/

/

MAC

PoE

/

- [] < >



2.

3. POE /ARP


- POE
[POE] < > POE
POE POE POE
- ARP
[ARP] < > ARP


1.3.4

1.
(1) .

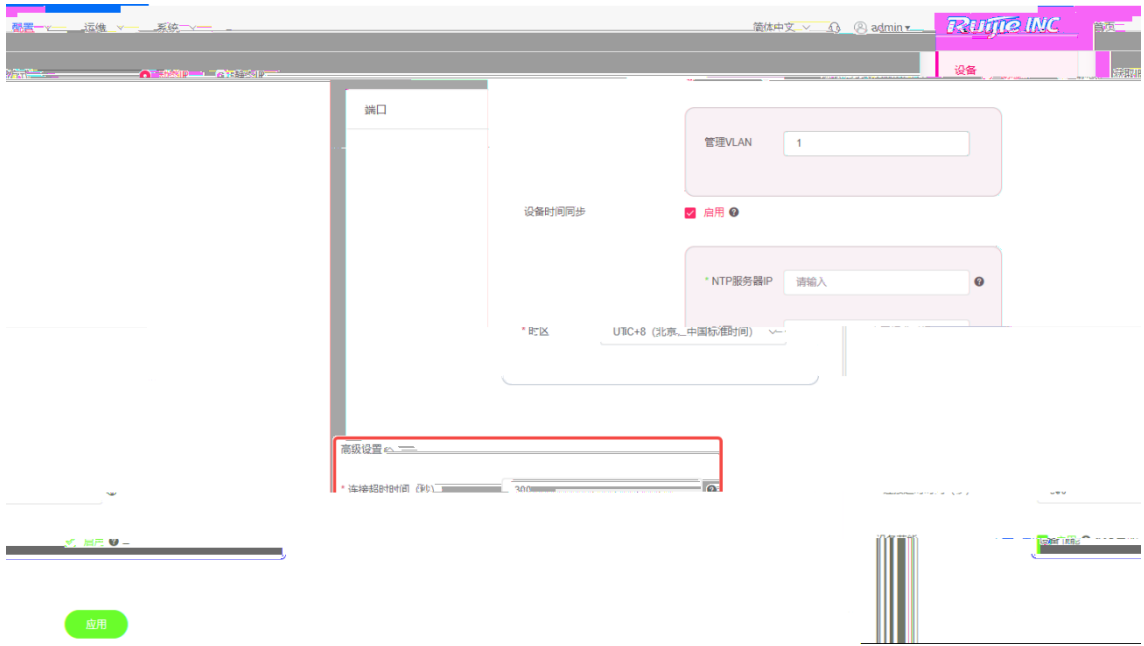



b

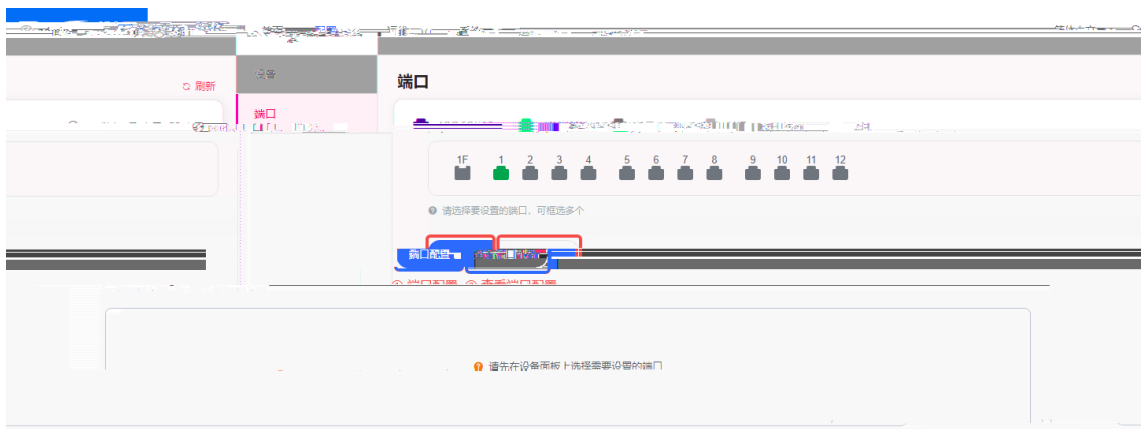




(2) IP

a

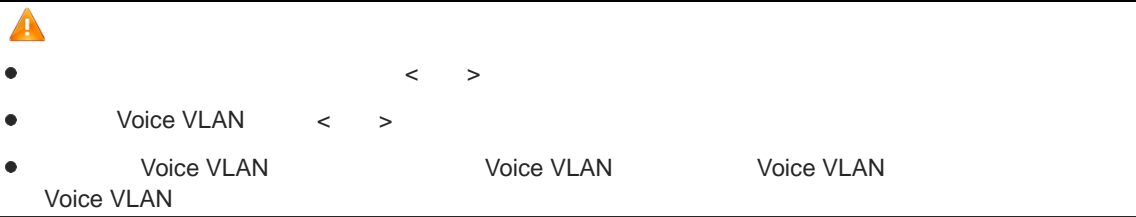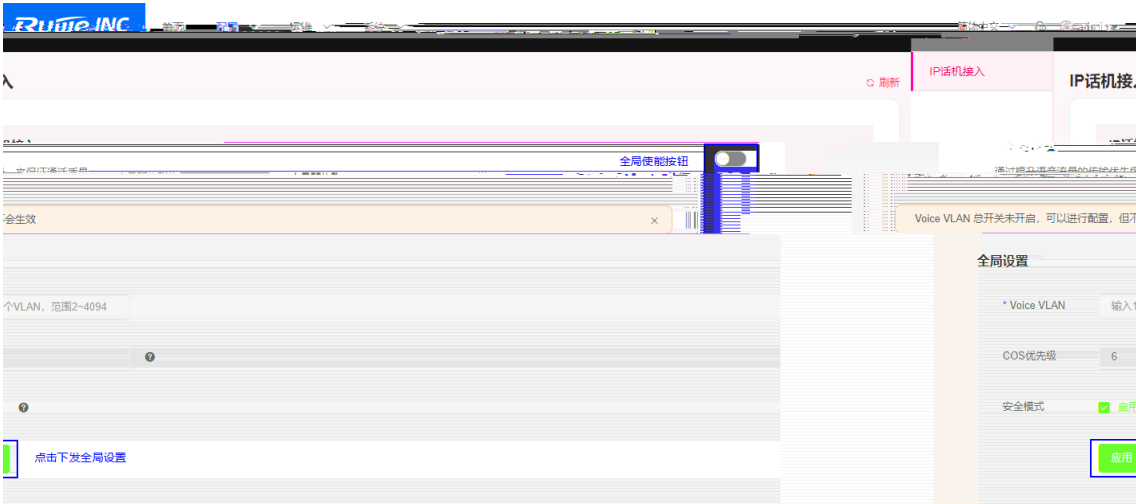

b OUI

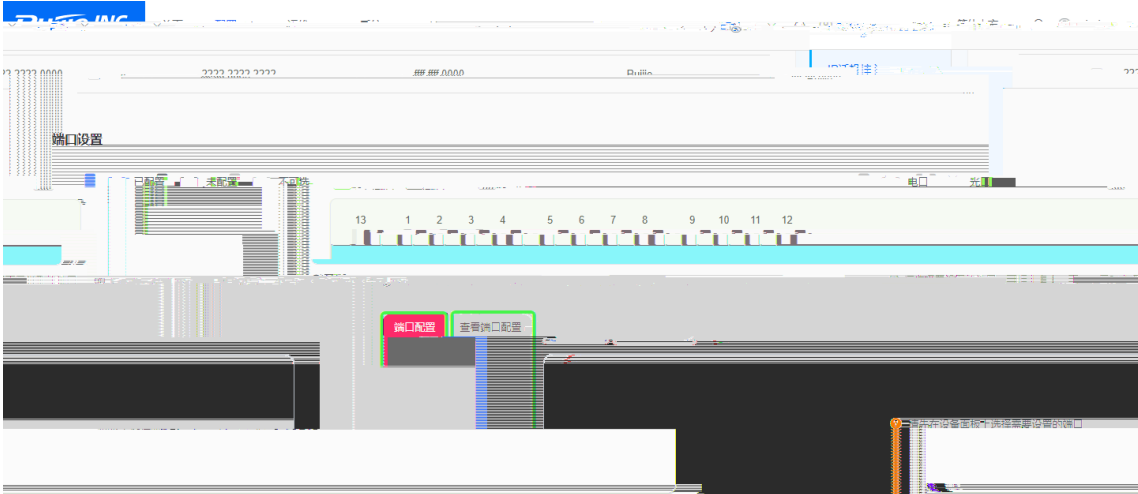


< >

Voice VLAN LLDP-MED

< >

< >

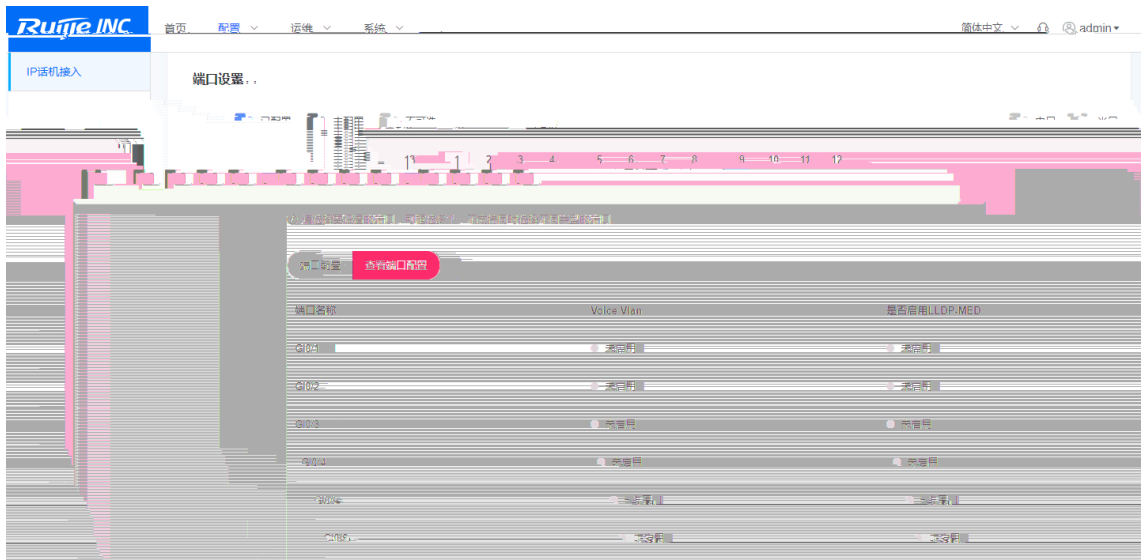

1.3.5

1.


(1) Ping

[Ping]


IP

<

>

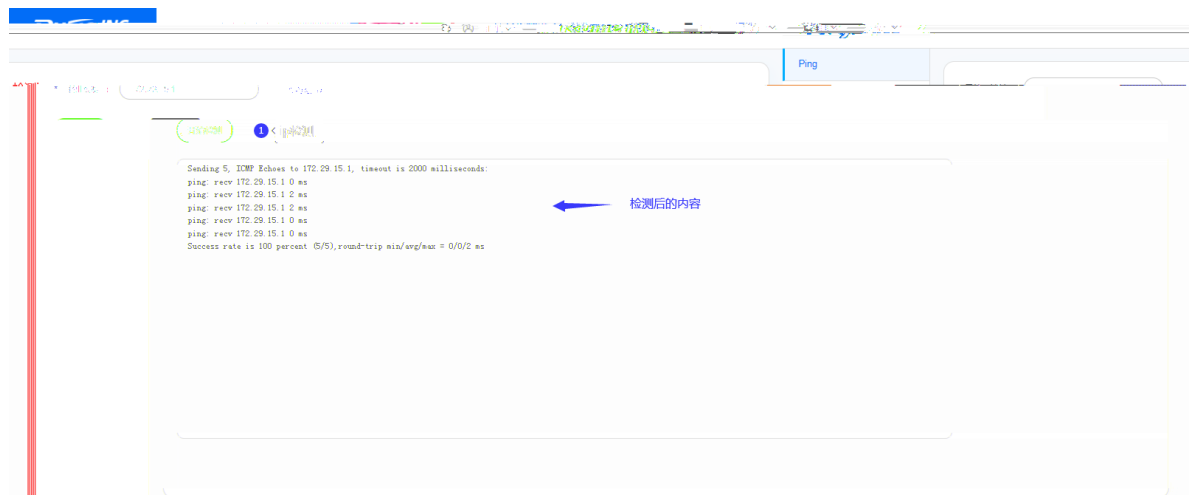

(2)

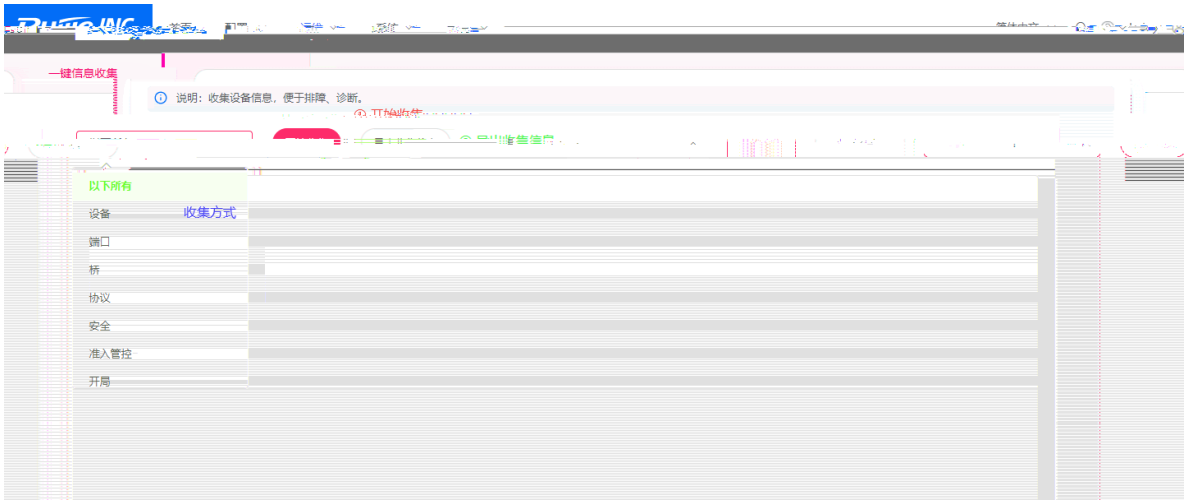

_20220118182247.txt

2.

(1)


< > 1




(2)



-
- 2-3

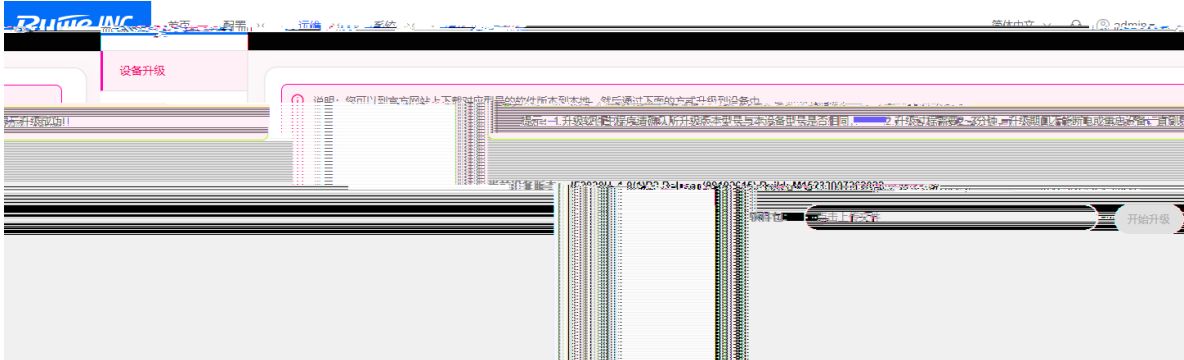


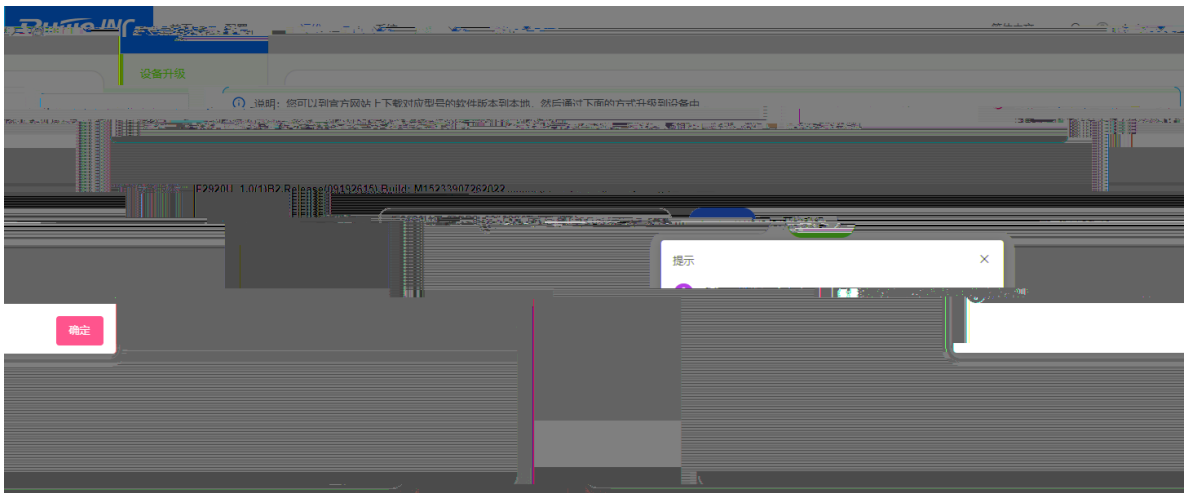

(3) Boot




Boot

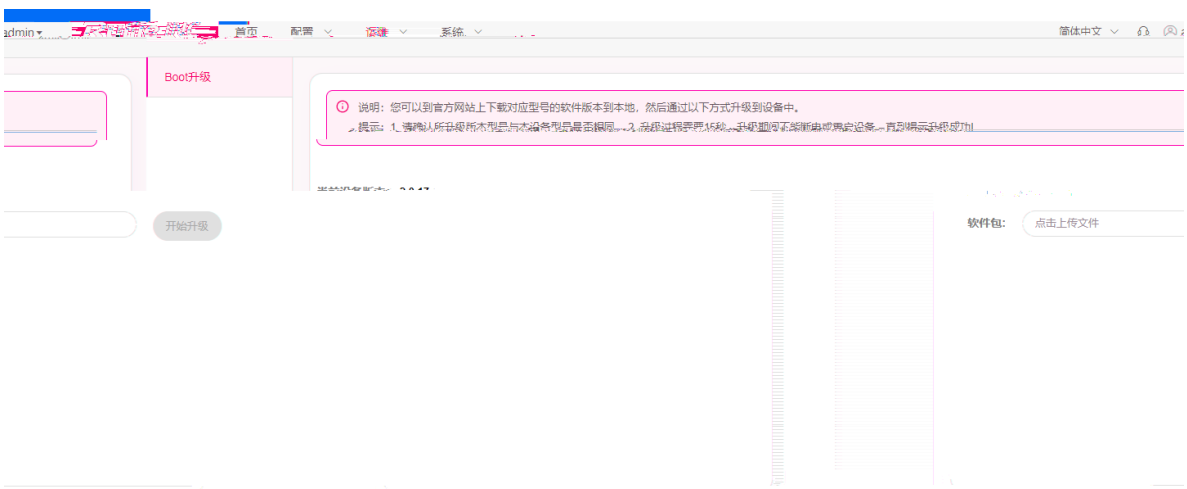

3.

(1)


a

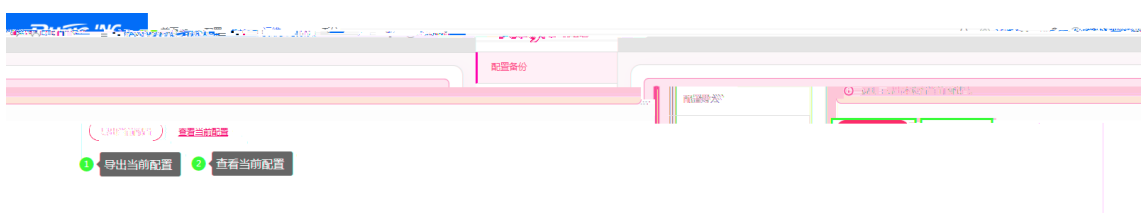

< > config.json

ò 04 ù F á >

b

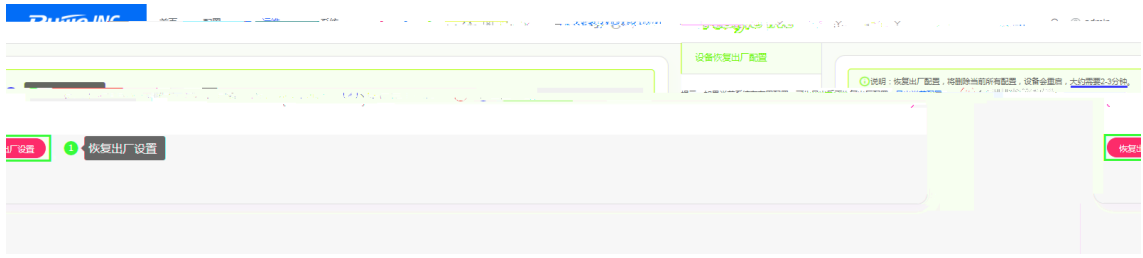

-

< >

-

< > config.json

1.3.6

1.

(1)

[]



2 CLI

CLI

2.1

WEB " Ruijie(diag)>"

CLI





ping ip ping

```
Ruijie(diag)ping 192.168.193.1
Sending 5, ICMP Echoes to 192.168.193.1, timeout is 2000 milliseconds:
ping: recv 192.168.193.1 1 ms
ping: recv 192.168.193.1 0 ms
ping: recv 192.168.193.1 1 ms
ping: recv 192.168.193.1 0 ms
ping: recv 192.168.193.1 0 ms
Success rate is 100 percent (5/5),round-trip min/avg/max = 0/0/1 ms
Ruijie(diag)#
```