





**P-720**

©2008





Arial

[ ] [ ]

{ x|y|... }

[ x|y|... ]

//

**1.**



2.

3.

a

Enter a

" "

1+ 2  
" Alt" " A"

Ctrl+Alt+A " Ctrl"

1 2

Alt F Alt

F

1	.....	3
1.1	.....	3
1.2	.....	3
1.3	.....	4
1.4	BSSID .....	4
1.5	.....	4
1.6	.....	4
1.7	.....	4
2	.....	6
2.1	Super AP .....	6
2.1.1	.....	6
2.1.2	Multiple BSSID ( 32 BSSID) .....	6
2.1.3	AAA.....	6
2.1.4	.....	6
2.1.5	.....	7
2.2	Super Brige.....	7
3	.....	8
3.1	FCC .....	8
3.2	IC .....	9
4	.....	10
4.1	AP + Bridge .....	10
4.2	AP + AP .....	11
5	.....	12
5.1	.....	12
5.2	.....	13
5.2.1	.....	13
5.2.2	.....	13
5.2.3	LEDs.....	14
5.2.4	RF .....	14
5.3	.....	15

6.2.4	System.....	19
6.3	Status .....	20
6.3.1	Status   Device Status.....	20
6.3.2	Status   Wireless Status .....	21
6.3.3	Status   Interface Statistics .....	22
6.4	Network .....	23
6.4.1	Network   Interface .....	23
6.4.2	Network   RADIUS Servers.....	25
6.4.3	Network   DHCP Settings .....	26
6.4.4	Network   NTP Settings .....	31
6.4.5	Network   Time Settings.....	33
6.5	Wireless .....	34
6.5.1	Wireless   Basic.....	34
6.5.2	Wireless   Advance.....	44
6.5.3	Wireless   WEP .....	51
6.5.4	Wireless   MAC ACL.....	52
6.6	System .....	55
6.6.1	System   Security .....	55
6.6.2	System   SNMP.....	56
6.6.3	System   Telnet.....	57
6.6.4	System   Configuration .....	57
6.6.5	System   Reset.....	59
6.6.6	System   Upgrade.....	60
7	.....	62
7.1	.....	62
7.2	.....	63
7.3	.....	64
7.3.1	802.11g .....	64
7.3.2	11a .....	65

# 1

RG-P-720

5GHz 2.4GHz

802.11b/g 802.11a

802.11a/b/g

AP RG-P-720

Wi-Fi

802.11a/g + 802.11a/g

802.11

a+g

Multiple SSID

SSID

## 1.3

DCA

## 1.4

### BSSID

32 BSSID BSSID BSSID  
SSID RADIUS VLAN ID BSSID  
802.1p tag 802.11e EDCA  
QoS

## 1.5

IEEE 802.3af POE

## 1.6

HTTPs WEB SSHv2 CLI

DHCP Server/DHCP Relay/DHCP Client

HTTPs

## 1.7

HTTPs Web  
CLI SSH

SNMP v1, v2, v3



MAC

Access Control

SSID

## 2.1.5

HTTPS, CLISH, SNMP


MIB

MIB


WEB

firmware

/



5.15 5.25GHz

 1 11 RG-P-780 2.4GHz

**3.2 IC**

Industry Canada

50

EIRP

5250-5350 MHz

# 4

RG-P-720 802.11a/b/g

AP + Bridge

AP + AP

## 4.1 AP + Bridge

AP + Bridge

11g AP + 11/7F12C5850B7071[(A83B5.349 Tf0 TcF33F5A2CAA4BC24E60TjTT1 1 Tf0

## 4.2 AP + AP

AP + AP  
802.11a/b/g

# 5

## 5.1

RG-P-720

2	4		
1	5	1.8	
1			
1		100-240VAC, 50-60Hz	12VDC

RG-P-720

Adobe Acrobat Readers

Readme

## 5.2

### 5.2.1



RG-P-720

4

RG-P-720

Reset

RG-P-720

<b>Reset</b>	5
<b>Reset</b>	5

### 5.2.2

RG-P-720

RG-P-720



WLAN1	WLAN1
WLAN2	WLAN2
Power	
Reset	<p style="text-align: center;">Reset    5                      AP                      Reset    5</p> <p style="text-align: center;">AP</p>
LAN	
Console	

## 5.3

P-720  
PoE                      802.3af

### 5.3.1 PoE

1.

4                      RG-P-720

2.    RG-P-720                      IEEE802.3af                      PoE  
      RG-E-120



RG-E-120                      RG-P-720    LAN                      RG-E-120    PWR-LAN OUT  
 RG-E-120    LAN-IN                      hub



## 6 Web

### 6.1 Web

Web RG-P-720

1. IP RG-P-720  
P-720 IP

<https://192.168.2.2/a.rg>

RG-P-720 IP 192.168.2.2 subnet 255.255.255.0

2. RG-P-720 Web

admin admin01





3. RG-P-720 Web



Web

Status –  
Network –  
Wireless – RG-P-720  
System – RG-P-720  
Exit – exit web web

## 6.2

### 6.2.1 Status

Device Status –  
Wireless Status –  
Interface Statistics –

## 6.2.2 Network

**Interface** – RG-P-720 LAN Bridge TCP/IP  
**RADIUS Server** – 802.1x WPA RADIUS  
**DHCP Settings**– DHCP server DHCP relay  
**NTP Settings** – NTP  
**Time Settings** –

## 6.2.3 Wireless

**Basic** –  
**Advance** –Mutiple BSSID Bridge  
**WEP** – WEP WEP  
**MAC ACL** – RG-P-720 MAC ACL

## 6.2.4 System

## 6.3 Status

### 6.3.1 Status | Device Status

Device Status      RG-P-720

System	
System Mode	AP
System Version	P-720.WHT.2.40.5053
Up Time	0 day(s) 00:13
System Time	1970/01/01/ 00:13
WLAN1 MAC	00:90:4b:90:ff:35
WLAN2 MAC	00:90:4b:90:ff:45
Free System Memory	27,284 K bytes
Total System Memory	63,252 K bytes
Network	
LAN Mode	static-IP
LAN IP	
	Disabled
VLAN ID	

System Version      AP

firmware

Uptime – [day(s) hours:minutes]

System Time –      RG-P-720

Wlan1 MAC / Wlan 2 MAC –      RG-P-720      MAC

Free System Memory –

Total System Memory –      RG-P-720

LAN Mode –      RG-P-720    IP                      IP                      DHCP            IP

LAN IP –      RG-P-720    IP



---

<b>Antenna Gain –</b>				
2.4GHz	2dBi	RG-P-720	5GHz	2dBi
		0dBi		
<b>Total Output Power (EIRP) –</b>		RG-P-720	EIRP	

EIRP

## 6.4 Network

### 6.4.1 Network | Interface

Bridge

**Network Interface Configuration**

Bridge

**Edite**



## 6.4.2 Network | RADIUS Servers







RG-P-720 DHCP server

**IP Address from / IP Address to** – DHCP server IP  
**Netmask** – IP IP  
**Gateway** –  
**WINS Address** (Windows Internet Naming Service) – WINS  
 WINS IP [ ]  
**Lease Time** – IP [ 1-1000000]  
**Domain** – DHCP server [ 1-128 ]  
**DNS address** – DNS IP [ ]  
**DNS secondary address** – DNS IP [ ]

Save

DHCP Settings	
Name	Value
Status	DHCP Server
IP Address from	192.168.123.2
IP Address to	192.168.123.254
Netmask	255.255.255.0
Gateway	192.168.123.1
WINS Address	0.0.0.0
lease time(seconds)	864000
Domain	
DNS Address	0.0.0.0
DNS Secondary Address	0.0.0.0
<input type="button" value="Edit"/>	
<input type="button" value="Apply Changes"/> <input type="button" value="Discard Changes"/>	
<b>Note:</b>	

DHCP server

DHCP server RG-P-720

Web RG-P-720 **Apply Changes**

DHCP Settings	
Name	Value
Status	DHCP Server
IP Address from	192.168.123.2
IP Address to	192.168.123.254
Netmask	255.255.255.0
Gateway	192.168.123.1
WTNS Address	0.0.0.0
lease time(seconds)	864000
Domain	
DNS Address	0.0.0.0
DNS Secondary Address	0.0.0.0
	<a href="#">Edit</a>

**Note:**

[Reboot](#)

**Server needs to be restarted. Please reboot.**

DHCP Settings	
Name	Value
Server IP	192.168.2.1

Note:

Server IP – DHCP IP

DHCP Relay DHCP

Save


DHCP Settings	
Name	Value
Status	DHCP Relay
Server IP	192.168.2.1

[Edit](#)

[Apply Changes](#) [Discard Changes](#)

Note:

Web RG-P-720 Apply Changes



### 6.4.4 Network | NTP Settings

NTP Network Time protocol NTP NTP  
Network| NTP Settings NTP

NTP Server		
Ntp Status:	enable	
Time Zone:	GMT+08:00	
Name	ServerIP	Action
Ntpserver-1	107.46.103.100	Delete Edit
Add		
<b>Note:</b>		

- NTP status – NTP
- Time Zone – NTP
- Delete – NTP
- Edit – NTP
- Add – NTP
  
- Add NTP

NTP Server		
Name	ServerIP	
	207.46.103.100	Ntpserver-1
Save Cancel		
<b>Note:</b>		

Save



Reboot –

RG-P-720

**Reboot****Reboot**

## 6.4.5 Network | Time Settings

### Network | Time Settings

Date Configuration	
Date	2005/07/19
Time	13:51
<input type="button" value="Edit"/> <input type="button" value="refresh"/>	
<b>Note:</b>	

**Edit**

Date Configuration	
Date	2005 / 07 / 19
Time	13 : 58
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	
<b>Note:</b>	

**Apply**

## 6.5 Wireless

### 6.5.1 Wireless | Basic

wireless | Basic

RG-P-720

regulatory domain

Layer 2 Isolation

Basic Wireless Setting	
Radio :	wlan1
Name	Value
Domain	WORLD
Static Channel	11
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2dBi
RTS Threshold	2347 bytes
Layer2 Isolation	disabled
Mode	AP
Action	<a href="#">Edit</a> <a href="#">Site Survey</a>

**Note:**

**Edit –**

**Site Survey –**

DCA

Basic Wireless Setting	
Radio :	wlan1
Name	Value
Domain	WORLD
Auto Channel	11
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2.3dBi
Threshold	2347 bytes
Threshold	10 mins
Optional channel	1,6,11 channel
Layer 2 Isolation	disabled
Mode	AP

[Edit](#)
[Site Survey](#)
[Action](#)

**Radio** – RG-P-720

**Domain** – Regulatory Domain

**Static Channel / Auto Channel** – AP

DCA Dynamic Channel Allocation

Auto Channel

Static Channel

DCA Dynamic Channel Allocation

AP

**Band** –

2.4GHz 11g only

**Basic Wireless Setting**

Radio : wlan1

Name	Value
Domain	WORLD
Channel	11

Band

Total Output Power (EIRP)

Antenna Gain

RTS Threshold

Layer2 Isolation

Mode

Action

**Note:**

Microsoft Internet Explorer

When site survey, all connecting wireless clients will be kicked off  
Do it anyway?

site survey

Radio: wlan1

Basic Wireless Setting

Rescan –

Return – Basic Wireless Setting

	Site Survey	RG-P-720	RG-P-720
	Site Survey		AP

Basic Wireless Setting	
Name	Value
Radio Name	wlan1
Domain	WORLD
Channel	1
Band	2.4GHz (Mixed 11g)
Total Output Power (EIRP)	14 dBm
Antenna	FRE Dual Band
<input type="text"/> bytes [0..2347]	RTS Threshold <input type="text"/> 2347
<input type="text"/> mins <input type="checkbox"/> Enable DCA	DCA Threshold <input type="text"/> 10
<input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> all	DCA optional channel <input type="checkbox"/> 1 <input type="checkbox"/> 2
	Layer2 Isolation <input type="text"/> disabled
	Mode <input type="text"/> AP
<input type="button" value="Cancel"/>	<input type="button" value="Save"/>
<b>Note:</b>	

DCA

**Basic Wireless Setting**

Name	Value	
Name	wlan1	Radio
Domain	WORLD	Domain
Channel	1	Channel
Band	2.4GHz (Mixed 11g)	Band
Output Power (EIRP)	14 dBm	Total
Antenna	FRE Dual Band	Antenna
RTS Threshold	2347 bytes [0..2347]	RTS Threshold
CCA Threshold	10 mins <input checked="" type="checkbox"/> Enable DCCA <input type="checkbox"/>	CCA Threshold
Available optional channel	<input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input checked="" type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input checked="" type="checkbox"/> 11 <input type="checkbox"/> all	Available optional channel
Interference Isolation	disabled	Interference Isolation
Mode	AP	Mode

**Note:** Not

**Radio Name**                      RG-P-720

**Domain**    regulatory domain

2.4 GHz      5 GHz



**Channels**                      RG-P-720

Regulatory Domain

RG-P-720

AP

AP  
2.4GHz  
36 46 64

4  
1 6 11

5.8GHz

AP

**Band**


6

5GHz 11a

5GHz Turbo Mode 11a      2.4GHz Mixed 11g  
Mixed 11g WiFi      2.4GHz 11g only WiFi

2.4GHz 11g only

2.4GHz



DCA

DCA site survey  
RG-P-720

DCA optional channel DCA

DCA DCA threshold DCA optional channel

**Layer 2 Isolation**

Mode AP Bridge



Bridge RG-P-720 Bridge RG-P-720  
RG-P-720

Save –

Save

Basic Wireless Settings	
Radio :	wlan1
<b>Name</b>	<b>Value</b>
Domain	WORLD
Static Channel	1
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2dBi
RTS Threshold	2347 bytes
Layer2 Isolation	disabled
Mode	AP
Action	<input type="button" value="Edit"/> <input type="button" value="Site Survey"/>
<input type="button" value="Apply Changes"/> <input type="button" value="Discard Changes"/>	
<b>Note:</b>	

## DCA

Basic Wireless Setting	
Radio :	wlan1
<b>Name</b>	<b>Value</b>
Domain	WORLD
Auto Channel	auto
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2dBi
RTS Threshold	2347 bytes
DCA Threshold	10 mins
DCA optional channel	1,6,11 channel
Layer2 Isolation	disabled
Mode	AP
Action	<input type="button" value="Edit"/> <input type="button" value="Site Survey"/>
<input type="button" value="Apply Changes"/> <input type="button" value="Discard Changes"/>	
<b>Note:</b>	

Discard Changes –

DCA

DCA

Basic Wireless Setting	
Radio :	wlan1
Name	Value
Domain	WORLD
Auto Channel	11
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2dBi
RTS Threshold	2347 bytes
DCA Threshold	10 mins
DCA optional channel	1,6,11 channel
Layer2 Isolation	disabled
Mode	AP
Action	<input type="button" value="Edit"/> <input type="button" value="Site Survey"/>
<b>Note:</b>	
<input type="button" value="Reboot"/>	
<b>Server needs to be restarted. Please reboot.</b>	

Edit

Edit

Reboot

Reboot

Edit

Save

Reboot

## 6.5.2 Wireless | Advance

RG-P-720 Multiple BSSID MBSSID 16 BSSID  
BSSID RG-P-720  
AP VLAN ID BSSID  
AP **Wireless | Advance**  
Multiple BSSID SSID SSID VLAN  
SSID

BSSID SSID Multiple BSSID Multiple ESSID

**Edit – MBSSID**  
**Delete – MBSSID AP MBSSID**

**Detail MBSSID**

<input checked="" type="checkbox"/> <b>Advance Wireless Setting</b>	
Radio:	wlan1
Interface:	wlan1_0
Mode:	AP
SSID:	P-780
Hidden SSID:	Disabled
Use VLAN:	Disabled
VLAN ID:	1
802.1p Tag	
SSID priority	Disabled
Security:	Disabled
<input type="button" value="Refresh"/> <input type="button" value="Return"/>	
<b>Note:</b>	

**Radio – radio WLAN1 WLAN2**  
**Interface –**  
**Mode –**  
**SSID – SSID**  
**Hidden SSID – Hidden SSID**  
**Use VLAN – VLAN**  
**VLAN ID – VLAN VLAN ID**  
**802.1p Tag – 802.1p tag tag**  
**SSID priority – BSSID 0**  
**Accounting –**  
**Security –**  
**Current Connect Number –**  
**Detail – MAC**  
**Refresh**  
**Return – Advance Wireless Setting**  
**Detail**

Current Connected Clients MAC List						
index	Client MAC	IP Addr	Auth Type	Signal/Noise	Input Packets #	Output Packets #
1	00:0f:3d:e1:15:16	192.168.2.100	NONE	22	92	7
<input type="button" value="Refresh"/> <input type="button" value="Add Client"/>						
Note:						

**Client MAC** – MAC  
**IP Addr** – IP  
**Auth Type** – PEAP TLS  
           TTLS PSK  
**Signal/Noise** – SNR  
**Input Packets** –  
**Output Packets** –

AP                      **New**    **Edit**                      MBSSID

**Advance Wireless Setting**

Radio: wlan1

Interface: wlan1\_0

Mode: AP

Hidden SSID:  Enable Hidden SSID

VLAN and QoS

SSID priority(Di...

Enable VLAN

priority:  (0~7)

VLAN ID:  (1~4094)

802.1p Tag  (0~7)

Accounting

Enable Accounting

Accounting Server Profile:

Accounting Interim Interval:  Minut

**Radio** – [wlan1/wlan2]  
**Mode** – RG-P-720 [AP/Bridge]  
**Interface** –  
**SSID** – 32  
           SSID P-720g AP SSID  
           AP SSID

MBSSID	BSSID	SSID	BSSID	SSID
SSID	-	-		

**Hidden SSID –**

SSID	SSID	Beacon [enabled/disabled]	disabled	SSID AP
------	------	---------------------------	----------	---------

<b>VLAN and QoS –</b>	VLAN	QoS	BSSID
802.11e EDCA	802.1p		

<b>SSID priority (Disable VLAN) –</b>	QoS	(B)SSID BSSID	802.11e EDCA BSSID
---------------------------------------	-----	---------------	--------------------

8	1, 2, 0, 3, 4, 5, 6, 7	AP
---	------------------------	----

QoS	0	0
-----	---	---

<b>Enable VLAN –</b>	VLAN	SSID	VLAN ID
802.1p tag			

<b>VLAN ID –</b>	VLAN ID	1	4094
------------------	---------	---	------

<b>802.1p Tag –</b>	802.1p Tag	QoS
0	7	

802.1p tag	8	1, 2, 0, 3, 4, 5, 6, 7
------------	---	------------------------

**Accounting –**

**Enable Accounting –**

RADIUS	RADIUS
802.1x WPA WPA2 WPA2 MIXED	MAC auth

Security:			
<input type="radio"/>	WEP(Wired Equivalent Privacy)	WEP Key Index:	1
<input type="radio"/>	802.1x	RADIUS Server Profile:	
		RADIUS Server is NULL.	
		Dynamic Key Length:	<input checked="" type="radio"/> 64 bits <input type="radio"/> 128 bits
		<input type="radio"/>	WPA
		RADIUS Server Profile:	
TKIP	Interval: <input type="text"/> Minutes	<input type="radio"/>	WPA2
Profile:		RADIUS Server Profile:	
RADIUS Server is NULL. Click here to add profile		Algorithm:	
TKIP	Interval: <input type="text"/> Minutes	Group Key Rekey Interval:	
Profile:		<input type="radio"/>	WPA2 MIXED
RADIUS Server is NULL. Click here to add profile		RADIUS Server Profile:	
TKIP	Interval: <input type="text"/> Minutes	Algorithm:	
Profile:		Group Key Rekey Interval:	

**Security –**

**WEP – WEP**

**WEP WEP Key Index**

**WPA2 MIXED –**

**WPA2**

**WPA**

**RADIUS Server Profile –**

**RADIUS**

Network | RADIUS Servers

**Algorithm –**

WPA

WPA2

[TKIP/AES]

**Group Key Rekey interval –**

10

<input type="radio"/> WPA-PSK		
	Use Pre-Shared Key:	<input type="text"/>
	Algorithm:	TKIP <input type="button" value="v"/>
	Group Key Rekey Interval:	<input type="text"/> Minutes
<input type="radio"/> WPA2-PSK		
	Use Pre-Shared Key:	<input type="text"/>
	Algorithm:	TKIP <input type="button" value="v"/>
	Group Key Rekey Interval:	<input type="text"/> Minutes
<input type="radio"/> WPA2-PSK MIXED		
	Use Pre-Shared Key:	<input type="text"/>
	Algorithm:	TKIP/AES
	Group Key Rekey Interval:	<input type="text"/> Minutes
		<input type="radio"/> MAC Auth
<input type="button" value="v"/>		RADIUS Server Profile:
RADIUS Server Profile: <a href="#">Click here to add profile...</a>		
		<input type="radio"/> Disabled

**WPA-PSK –**

**RADIUS**

**WPA PMK**

**WPA2-PSK –**

**RADIUS**  
**WPA2 PSK**

**WPA2 PMK**  
**AP WPA PSK**

**WPA2**

Disabled –

BSSID

Advance Wireless Setting			
Radio:	wlan2		
Interface:	bridge2_0		
Mode:	Bridge		
Remote MAC:	<input type="text" value="00:00:00:00:00:00"/>		
Security:	<input type="radio"/> WEP(Wired Equivalent Privacy)		
	WEP KeyIndex:	<input type="text" value="1"/>	
	<input type="radio"/> WPA-PSK		
	Algorithm:	<input type="text" value="TKIP"/>	
	Rekey Interval:	<input type="text" value=""/>	
<input checked="" type="radio"/> Disabled			
<input type="button" value="Save"/> <input type="button" value="Cancel"/>			Note:

**Remote MAC** – Bridge link MAC  
**Security** – WEP WPA-PSK(TKIP AES)  
**Use Pre-Shared Key** – 8-64 WPA  
**Algorithm** – TKIP, AES  
**Rekey Interval** –

WEP key WPA-PSK  
 WEP aaaaa Wireless | WEP

### 6.5.3 Wireless | WEP

Wireless | WEP WEP

Wireless | Advance WEP WEP

<b>Radio Setting</b>		
Radio:	wlan1	
<b>WEP Configuration</b>		
Index	Key	Action
Key 1	*****	<input type="button" value="Edit"/>
Key 2	*****	<input type="button" value="Edit"/>
Key 3	*****	<input type="button" value="Edit"/>
Key 4	*****	<input type="button" value="Edit"/>
The network password needs to be 64bits or 128bits depending on your network configuration. This can be entered as 5 or 13 ascii characters or 10 or 26 hexadecimal characters.		
<b>Note:</b>		


**Radio** – [wlan1/wlan2]

**Edit** – WEP

WEP                      aaaaa

Radio:			wlan1
<b>Action</b>		<b>Index</b>	<b>Key</b>
<input type="button" value="Save"/> <input type="button" value="Cancel"/>		Key 1	<input type="text"/>
*****	<input type="button" value="Edit"/>		Key 2
*****	<input type="button" value="Edit"/>		Key 3
*****	<input type="button" value="Edit"/>		Key 4
password needs to be 64bits or 128bits depending on your network configuration. This can be entered as 5 or 13 ascii characters or 26 hexadecimal characters.			The network characters or 10
<b>Note:</b>			

## 6.5.4 Wireless | MAC ACL

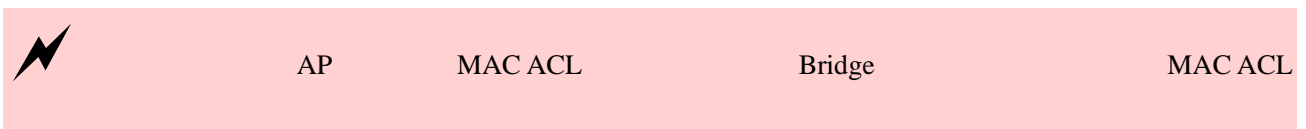

MAC ACL                      RG-P-720

Wireless | MAC ACL

<b>Radio Setting</b>	
Radio:	wlan1
<b>Policy Setting</b>	
Policy	disabled <a href="#">Edit</a>
<b>MAC ACL Configuration</b>	
MAC List	Action
	<a href="#">Add</a>
<b>Note:</b>	

MAC Address – MAC [ 00:AA:A2:5C:89:56]

Save – MAC

The screenshot shows a configuration page with three main sections: **Radio Setting** (Radio: wlan1), **Policy Setting** (Policy: deny), and **MAC ACL Configuration**. The MAC ACL table has one entry with MAC 00:90:4B:00:02:19 and Action Deny. Buttons for 'Add', 'Delete', 'Apply Changes', and 'Discard Changes' are visible.

Apply Changes –

Apply Changes

Discard Changes –

Apply Change

The screenshot shows the configuration page after changes. A **Note:** section is present with a **Reboot** button and a green message: "Server needs to be restarted. Please reboot." The MAC ACL table now shows the entry with a **Delete** button.

Reboot – Reboot

**Reboot**

**Reboot**

## 6.6 System

### 6.6.1 System | Security

#### System | Security

**User Name** – RG-P-720 Web CLI [1-32  
]

**Old Password** –

**New Password** – [4-8  
]

**Confirm Password** –

**Save** – Save

4-8

admin

admin01

Save

## 6.6.2 System | SNMP

SNMP  
SNMP

Internet

SNMP

System | SNMP

SNMP

General Configuration		
Name	Value	Action
Readonly community	public	<a href="#">EDIT</a>
Readwrite community	private	<a href="#">EDIT</a>
DefaultTrap community	public	<a href="#">EDIT</a>

Trap Configuration		
Trap Group	Host	Host Port

Note: SNMP Configuration

General Configuration –

Trap Configuration					
Index	Host Ip	Host Port	Trap Type	Community	Action
	<input type="text"/>	<input type="text"/>	trapsink	<input type="text"/>	<input type="button" value="Save"/> <input type="button" value="Cancel"/>
			<ul style="list-style-type: none"> <li>trapsink</li> <li>trap2sink</li> <li>informsink</li> </ul>		
Note: SNMP Configuration					

**Host IP** – SNMP IP [ 192.168.2.100]  
**Host Port** – trap [ ]  
**Trap Type** – trap [v1/v2/inform]  
**Community** – SNMP trap table [1-32 ASCII ]  
**Save** –  
**Cancel** –

### 6.6.3 System | Telnet

System | Telnet RG-P-720 telnet/SSH

Telnet		
Name	Status	Action
Telnet Service	Enabled	<input type="button" value="Edit"/>
SSH Service	Enabled	<input type="button" value="Edit"/>
Note:		

**Telnet Service** – RG-P-720 telnet  
**SSH Service** – RG-P-720 SSH  
**Enabled** telnet/CLISH RG-P-720  
 IETF SSH SSHv2

### 6.6.4 System | Configuration

System | Configuration

**Backup** –  
**Upload/Restore** –

## System Configuration

Configuration Backup	
Description Message	Action
P-720.GSI. 2. 13. 1228	<input type="button" value="Preparation"/>

Configuration Upload	
Description Message	Action
Configuration file to upload	<input type="text"/> <input type="button" value="Browse..."/>
	<input type="button" value="Upload"/> <input type="button" value="Cancel"/>

**Note: System Configuration**

Preparation

PC

Configuration Backup	
Description Message	Action
P-720.GSI. 2. 13. 1228	<input type="button" value="Preparation"/>

.cfg

Description Message –

Preparation –

Configuration Backup	
Message	Action
<p>and store Configuration backup file in safe place.                      Configuration file name should only include English characters or numbers.</p>	<input type="button" value="Download"/>

**Note: System Configuration**



RG-P-720

Browse

RG-P-720


Configuration Upload	
Description Message	Action
Configuration file to upload	<input type="text"/> <input type="button" value="Browse..."/>
<input type="button" value="Upload"/> <input type="button" value="Cancel"/>	
<b>Note: System Configuration Upload.</b>	

## Upload


**Reboot –**

**Reset –**

**Reboot**

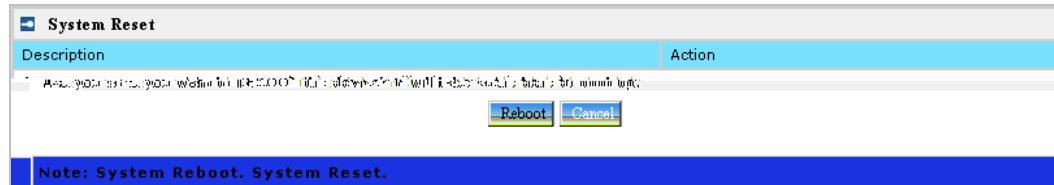

**Reset**

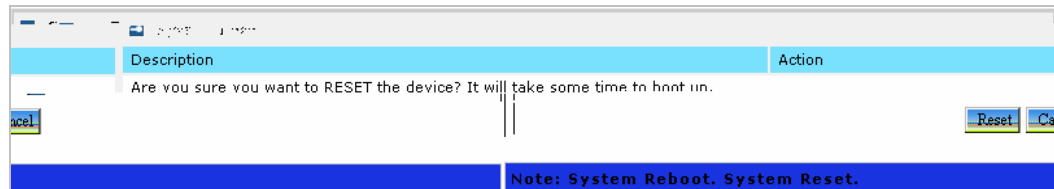

## 6.6.6 System | Upgrade



**Upload –**

firmware

**Upload**

firmware image

**Upload**

Firmware Upgrade	
Description	Action
<input type="text" value="Browse..."/>	Firmware image
<input type="button" value="Upload"/> <input type="button" value="Cancel"/>	<input type="button" value="OK"/>
<b>Note: Firmware Upgrade</b>	



POE	48V IEEE802.3af-2003
	: 100-240 VAC, 50-60Hz : 12VDC
4	Power LAN WLAN1 WLAN2
RG-P-720	
	RG-P-720
4	1.8m

## 7.2

		admin
		admin01
SNMP	Community	Public
SNMP	Community	Private

IP

	11g
Regulatory Domain	World
SSID	P-720g
	11
RTS	2347 bytes
EIRP	14dBm
	Open System
MAC ACL	Disable



44	5220				—
46	5230	—	—	—	
48	5240				—
		15 dBm	17 dBm	15 dBm	15 dBm
U-NII middle band (5250 – 5350 MHz)					
52	5260				—
56	5280				—
60	5300				—
64	5320				—
		17 dBm	17 dBm	17 dBm	—
U-NII upper band ( 5725 – 5875 MHz)					
149	5745		—	—	—
153	5765		—	—	—
157	5785		—	—	—
161	5805		—	—	—
165	5825	—	—	—	—
		17 dBm	17 dBm	17 dBm	—

OCOCOCOCOCOC